

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	



#### STANDARD



#### ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.

#### ELECTRICAL

Universal 120V - 277V voltage.

Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

- 4.8V Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

#### MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on backplate for wall mount.


#### HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.

#### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL listed for damp locations (0° – 50°C).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.
- Certified to CEC under Title 20 Regulations.

#### DIMENSIONS

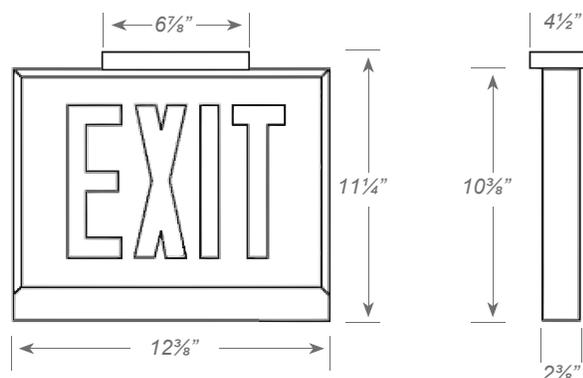

#### ORDERING INFORMATION

Sample Part Number: CAXTEU1RWEM-NA

MODEL	No. of FACES	LETTER	HOUSING	BATTERY	SIGNAGE / DIRECTIONAL ARROWS
CAXTEU	1 Single Face	R Red On White	W White	(blank) AC-Only	-NA Exit No Arrow
	2 Universal Single/Double Face		B Black	EM Battery Backup	-S-NA Stair No Arrow -DA Exit Double Arrow -S-DA Stair Double Arrow -RA <sup>1</sup> Exit Right Arrow -S-RA <sup>1</sup> Stair Right Arrow -LA <sup>1</sup> Exit Left Arrow -S-LA <sup>1</sup> Stair Left Arrow -LARA <sup>2</sup> Exit Left/Right Arrow -S-LARA <sup>2</sup> Stair Left/Right Arrow

<sup>1</sup> Available in single face configuration only.

<sup>2</sup> Available in double face configuration only.

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

### ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
All Models	5.0	5.0	0.10A	0.05A

### ARROW CONFIGURATION

