

UNIVERSAL CENTRAL INVERTER

LPS-POWER INVERTER 750-1150W, Universal Load Profile

Series LPS
REV #: LPS.12.25.02

OVERVIEW

Mid-size electrical inverter systems for powering up to 750 to 1150 watts of incandescent, fluorescent, induction or LED lighting loads. Pulse width modulated (PWM) output design provides clean, 60 Hz sinusoidal emergency power to fixtures up to 1000 feet away.

PROJECT:

TYPE:

CATALOG #:



FEATURES

- For powering incandescent, fluorescent, induction and LED fixtures*
- True sinusoidal output for maximum compatibility
- Universal 120/277VAC, 60Hz. Input/ Output
- Unit capacities up to 1150 watts
- Soft-start design reduces fixture in-rush current
- Unit may be installed up to 1,000 feet from controlled fixture(s)
- Lumen output from fixture is 100% of nominal
- Unique design eliminates compatibility problems with LED drivers as well as fluorescent and induction ballasts
- Compatible with dimming ballasts
- Normally-ON and/or Normally-OFF load output
- Provisions for local switching capability - Always on during emergency conditions regardless of local switch position
- Emergency fixtures can be ON, OFF or SWITCHED
- Solid-state, line latched low voltage disconnect provides protection against battery deep discharge
- Long life, maintenance-free lead-calcium battery
- Momentary test switch
- AC-ON, Charge-ON and Inverter-ON LED indicators

* Consult factory for compatibility for other lamp types

ORDERING INFORMATION EXAMPLE:LPS950-ICB-SDT

MODEL SERIES	POWER	OPTIONS ^{1,2}
LPS	750 WATTS	OCBX Output Breakers (X=1-6) ³
	950 WATTS	ICB Input Breaker ³
	1150 WATTS	SP Special Housing Color (Specify) 4AO Adjustable Output/Dimmer Bypass ⁴ 4C Four-Output Circuit Switching ⁴ SDT Self Diagnostics



LISTED

¹ Other options available. Consult factory.

² Some options may impact product UL listing. Consult factory.

³ Total number of Input/Output Circuit breakers not to exceed six.

⁴ Not available together.

- Heavy-duty steel cabinet is finished in white baked-on powder coat paint, providing scratch and corrosion resistance
- Optional special color paint (-SP) finishes are available upon request
- All models are designed for fast, easy wall mounting




ELECTRICAL SPECIFICATIONS

Input

- Input Voltages: Dual 120 or 277VAC $\pm 10\%$ (User selectable with two jumper wires provided)
- Input Frequencies: 60Hz $\pm 2\%$
- Input Surge Protection: Meets UL924
- Input Protection: Provided by Service Panel rated at 20 amps maximum

Output

- Output Voltages: 120 or 277VAC, 60Hz
- Efficiency: 98% at full rated load (line)
- Waveform: Digitally controlled sinusoidal
- Static Voltage: $\pm 5\%$ during battery discharge. 0-100% linear load
- Output Frequencies: 60Hz. $\pm 0.3\text{Hz}$ during emergency cycle
- Output Distortion: Less than 3% THO (linear load)
- Transfer Time: Less than 1.0 second
- Load Power Factor Range: 0.88 Lead to 0.88 Lag
- Minimum Loading: 0% of rated system capacity
- Output Protection: Circuit breaker and overload shut down protection

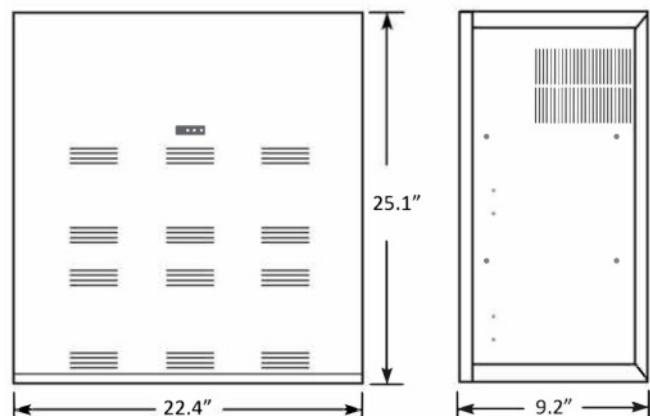

UNIVERSAL CENTRAL INVERTER

Series LPS

REV #: LPS.12.25.02

GENERAL SPECIFICATIONS

MODEL	INPUT/OUTPUT VOLTAGE	90 MIN CAPACITY WATTS/VA	TOTAL WEIGHT		EFFICIENCY (FULL LOAD)	TOTAL BATTERIES	BATT STRINGS	BATT VOLTS (VDC)	BATT CURRENT	AC INPUT CURRENT (MAX)		THERMAL OUTPUT (BTU)		DIMENSIONS (IN.)		
			LBS.	KG						120V	277V	ONLINE	EMERGENCY	W	H	D
LPS750	120/277 VAC	750	190	86.2	98%	8	2	48	18.2	7.53	3.26	14	416	22.4	25.1	9.2
LPS950	120/277 VAC	950	222	100.7	98%	10	2	60	18.2	8.45	3.66	18	484	22.4	25.1	9.2
LPS1150	120/277 VAC	1150	254	115.2	98%	12	2	72	18.2	10.2	4.42	22	535	22.4	25.1	9.2

WARRANTY & LISTINGS

- Unit: (excluding lamps) Full coverage against defects in materials and workmanship for 3 years from date of shipment
- Battery: 3 years full warranty, plus an additional 7 years of pro-rata coverage
- All models are UL924 Listed and meet NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (20 ° - 30 °C)
- Certified to CEC Under Title 20 regulations
- FCC Part 15 Class A Compliant

BATTERIES & CHARGER

BATTERIES

- Battery:** Sealed Lead Calcium (10 year life)
- Battery Voltages:** (LPS750) 48VDC, (LPS950) 60VDC, (LPS1150) 72VDC
- Runtime:** 90-minutes standard - based on battery performance at 25°C. Consult factory for other runtime options
- Battery Protection:** Standard low-voltage disconnect protects the battery from damage during prolonged power failures. Reverse polarity, DC overload, and short circuit protection via DC input breaker and fuse.

CHARGER


- Charger Type:** Fully automatic, temperature compensated, dual-mode charger
- Power Consumption (charger only):** (LPS750) 4.3W Standby, 53W Max; (LPS950) 5.4W standby, 63W Max; (LPS1150) 6.7W standby, 73W Max
- Recharge duty cycle:** Meets UL924 standard
- Battery Circuit Breaker:** Battery isolator
- Controls:** Momentary test switch, AC-ON, Charge-ON and Inverter-ON LEDs
- Safety:** AC lockout prevents battery discharge prior to initial power up. Brownout protection automatically activates emergency mode upon utility voltage reduction

ENVIRONMENTAL


- Altitude:** <10,000ft (3,000m) above sea level without derating
- Operating Temp:** 20°C to 30°C (Note: temperatures outside this range will affect battery performance and life)
- Relative Humidity:** 95% non-condensing

STANDARD WIRING DIAGRAMS


NORMALLY ON

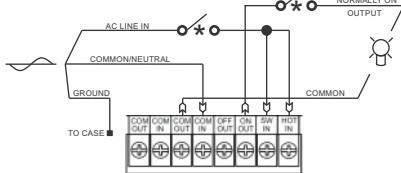


NORMALLY OFF

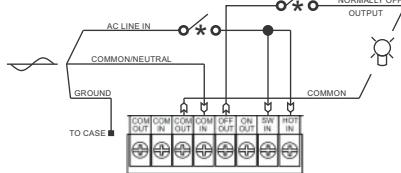

NORMALLY ON & OFF

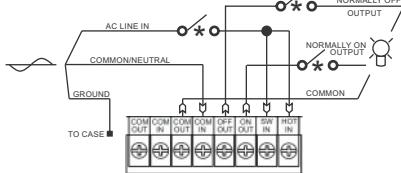

SWITCHED LOADS

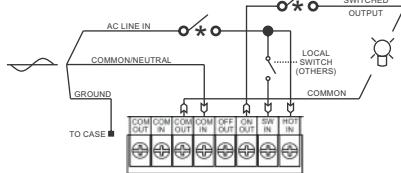

UNSWITCHED UTILITY INPUT (20A MAXIMUM)
 LIGHTING LOAD
 OPTIONAL DISCONNECT


All LPS systems provide a monitoring panel on the front of the unit to show operating status. This panel provides a test switch for user initiated system tests, and a three-LED array that provides an intuitive visual indication of unit readiness.

LPS ADVANTAGE


Compared to traditional, discrete emergency lighting units, the LPS Series provides emergency illumination from a single power source - resulting in less maintenance overhead and routine testing expenses. LPS units lower installation costs by powering existing light fixtures during an emergency. Connected fixtures are powered at full brilliancy for maximum egress lighting and occupant safety.

VOLTAGE SELECTION DETAIL

120V INPUT

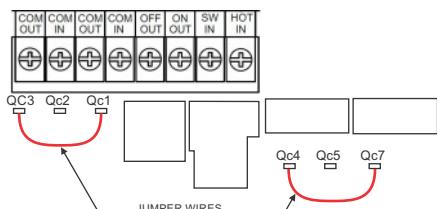

277V INPUT

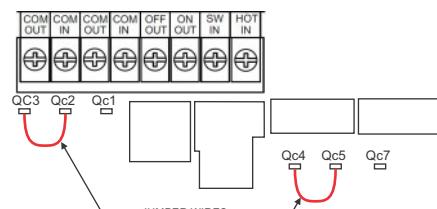

UNIVERSAL CENTRAL INVERTER

Series LPS

REV #: LPS.12.25.02

OPTIONAL ACCESSORIES

ADJUSTABLE OUTPUT

OPTION -4AO

FEATURES


- For use with 0 to 10 volt dimmable LED Lighting circuits
- Provides four user-adjustable emergency output circuits to deliver 25%, 50%, 75% or 100% of full illumination levels to selected LED fixtures during emergency mode operation - regardless of local dimmer control switch position
- Works with all standard 0 to 10 volt dimmer controls
- Reduced emergency illumination levels means fewer total emergency inverter units required on jobs
- Eliminates the need for up to four bypass devices on 0 to 10 volt dimmer controlled fixtures
- All wiring is done within the inverter housing, no need for additional j-boxes
- Allows normally-on, normally-off, combination and switched wiring of connected loads
- System may be remotely mounted up to 1,000 feet
- The 4AO Option is available on all LPS inverter models - *not compatible with 4C option*

OPERATION


The 4AO Option is designed for use with the LPS Series of inverter power systems. The option will bypass four 0 to 10 volt local dimmer switches as well as allow user-programmable setting of emergency output lighting levels. Four load terminals as well as four dip-switch sets for independent output settings are provided to allow 25%, 50%, 75% or 100% of nominal illumination output during power outages. This outstanding level of control allows for fewer LPS power systems to be required in typical applications.

DIMMING OPTION WIRING - 120V OPERATION

DIMMING OPTION PROGRAMMING TABLE

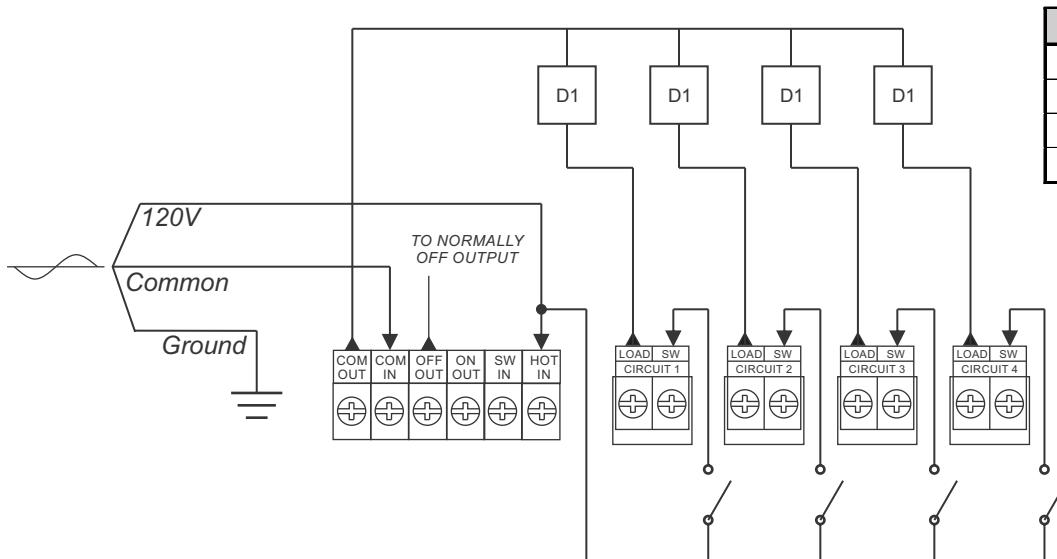

POSITION 1	POSITION 2	VOUT
OPEN (OFF)	OPEN (OFF)	10.0 V
OPEN (OFF)	CLOSED (ON)	7.5 V
CLOSED (ON)	OPEN (OFF)	5.0 V
CLOSED (ON)	CLOSED (ON)	2.5 V

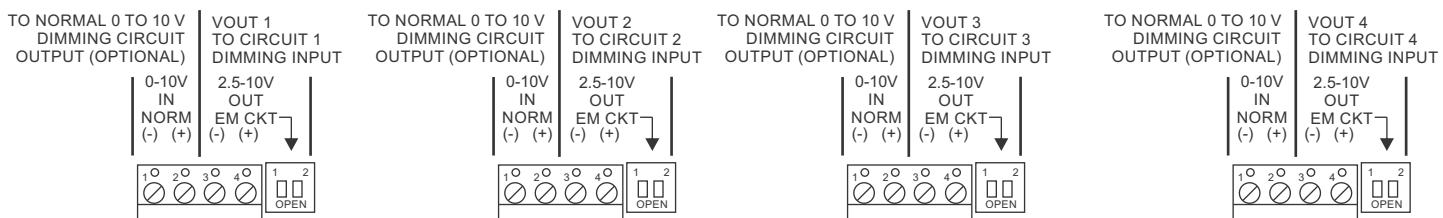

UNIVERSAL CENTRAL INVERTER

Series LPS

REV #: LPS.12.25.02

OPTIONAL ACCESSORIES

FOUR-CIRCUIT LOCAL SWITCH OVERRIDE

OPTION -4C



FEATURES

- Provides capacity for four override control circuits
- Provides full power emergency output to connected loads regardless of local control switch position or operating status
- Works with most standard local control devices including wall switches, dimmers, timers, occupancy sensors and ambient light sensors
- Ideal for use with incandescent, fluorescent or LED lighting fixtures
- Eliminates the need for bypass devices or separate inverters for each switched load providing cost efficiency
- All wiring is done within the LPS inverter housing, no need for additional j-boxes
- Allows normally-on, normally-off, combination and switched wiring of connected loads
- System may be remotely mounted up to 1,000 feet
- Available on all LPS models - *not compatible with 4AO option*

OPERATION



The LPS inverter power system's 4C option allows lighting fixtures or other load types on circuits controlled by local switching devices to be easily connected to and powered by the system during utility power outages. The 4C option provides four local switching device override circuits which, under emergency mode operating conditions, automatically disconnect the load side of the local control device(s) and connect the selected loads to the inverter output assuring normal operation of connected loads regardless of local control device switch position operating status.

TYPICAL APPLICATIONS FOR 4C OPTION

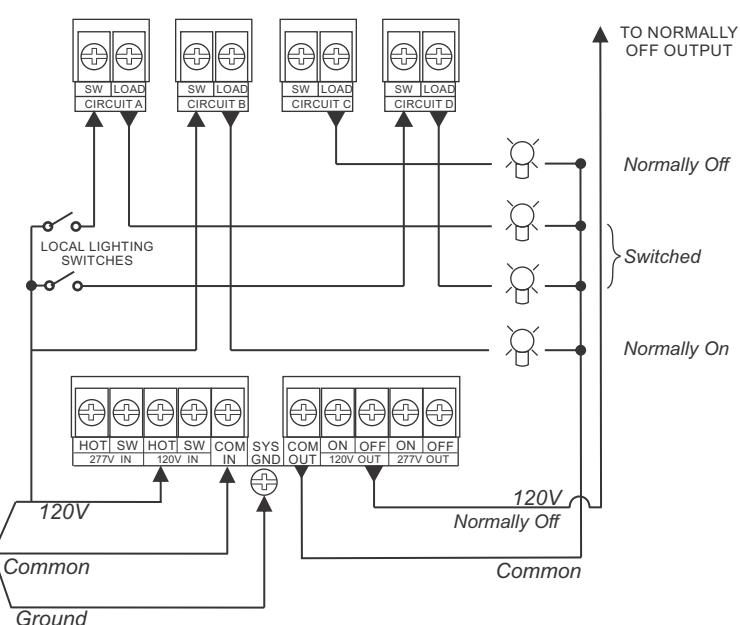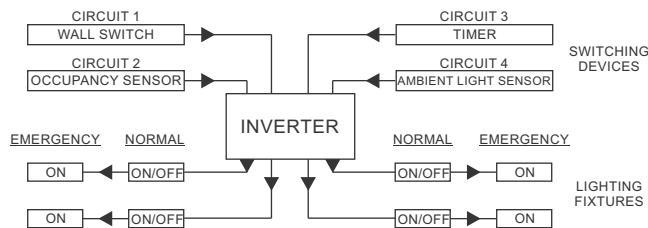

4C OPTION SCHEMATIC

4C OPTION LINE VOLTAGE SWITCHING

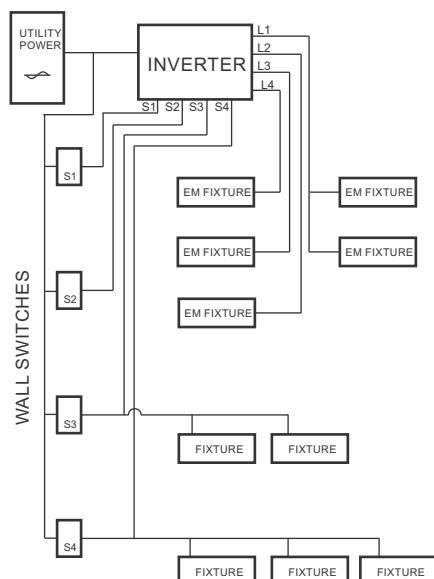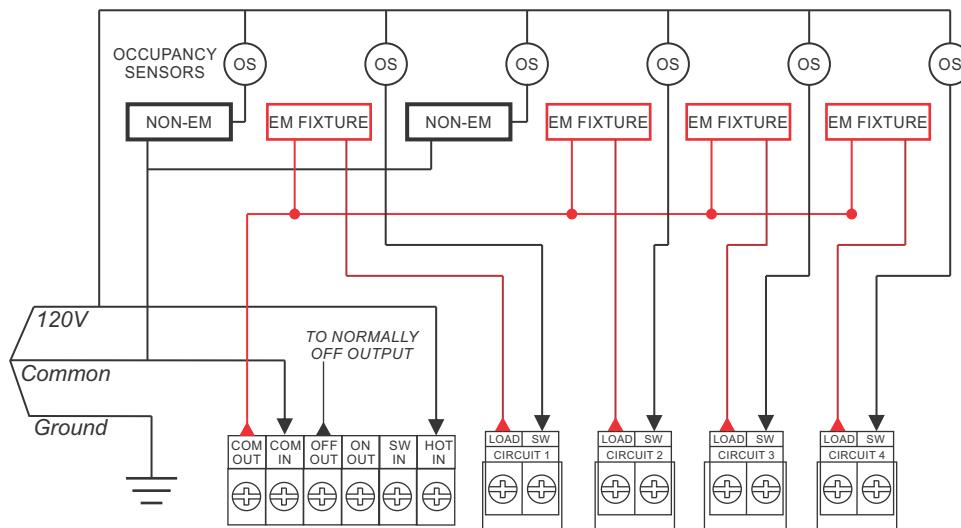

UNIVERSAL CENTRAL INVERTER

Series LPS

REV #: LPS.12.25.02

OPTIONAL ACCESSORIES

SELF TESTING & SELF DIAGNOSTICS

OPTION -SDT

FUNCTIONS

The self-diagnostic function is factory preset and performs the following:

- Monitoring of battery, battery charger and connected loads.
- Self-testing and a 30-second battery discharge once every 30 days after normal utility power has been supplied for a minimum of 48 hours.
- Self-testing and a 30-minute battery discharge once every 180 days after normal utility power has been supplied for a minimum of 48 hours.
- Self-testing and a 90-minute battery discharge once every 365 days after normal utility power has been supplied for a minimum of 48 hours.

SERVICE INDICATION

LED INDICATOR	STATUS
Steady GREEN	Normal Service
Blinking RED/GREEN	High Charge Mode
Blinking GREEN	Test Mode
One RED blink	Battery Charger Fault
Two RED blinks	Battery Fault
Four RED blinks	Load Fault

MANUAL TESTING

ACTION	FUNCTION
Push test switch once	30 second Test – One GREEN blink
Double push test switch	30-minute Test – Two GREEN blinks
Triple push test switch	90-minute Test – Three GREEN blinks
Push and hold for 3 sec.	Cancel Test
Push and hold for 6 sec.	System Reset