


Crystal Surface Mount Remote Edge-Lit Exit Sign

for Universal Central Battery System Series CBS

Series CRS-REC
REV 02.17.02

INSTALLATION INSTRUCTIONS AND OWNER'S MANUAL

Before installing or connecting any primary power wiring,
DISCONNECT MAIN POWER SUPPLY AT THE CIRCUIT BREAKER OR FUSE.

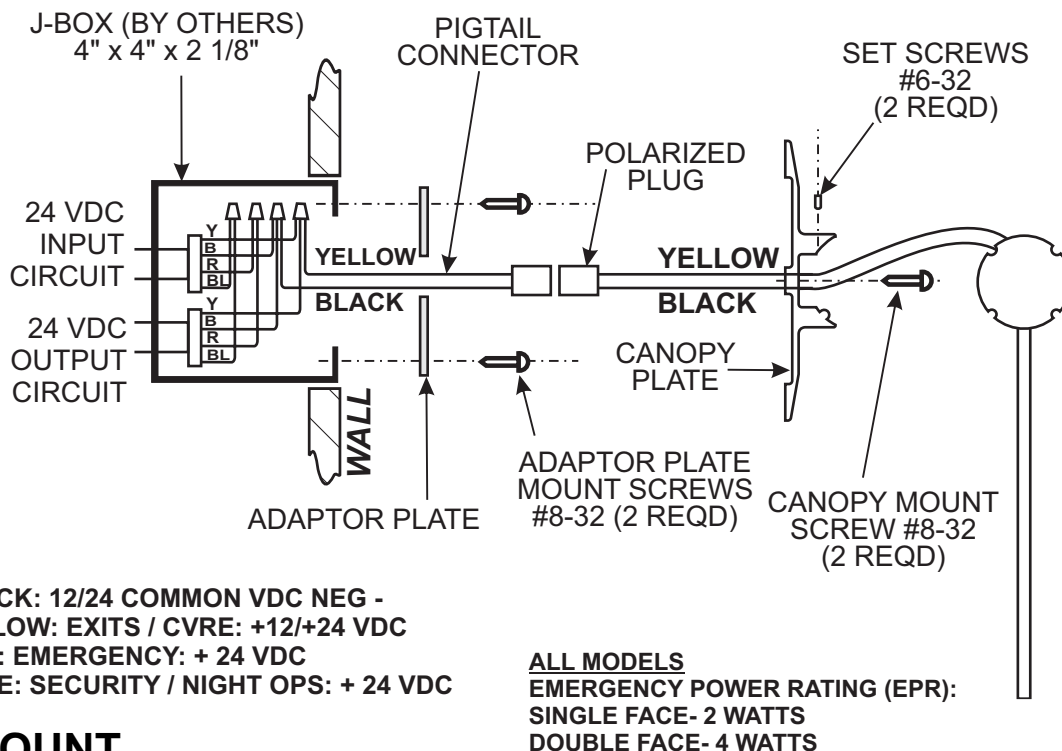

KEY

B BLACK: 12/24 COMMON VDC NEG -
Y YELLOW: EXITS / CVRE: +12/+24 VDC
R RED: EMERGENCY: + 24 VDC
BL BLUE: SECURITY / NIGHT OPS: + 24 VDC

ALL MODELS
EMERGENCY POWER RATING (EPR):
SINGLE FACE- 2 WATTS
DOUBLE FACE- 4 WATTS

WALL MOUNT

1. Install J-Box 1/8"-1/4" below finished panel surface. Connect 24VDC input/output circuit wiring as shown above, and connect the BLACK and YELLOW leads to the pigtail connector supplied.
2. Run Pigtail Connector through Adaptor Plate center hole and attach to J- box with 2 #8-32 screws.
3. Run pigtail connector through Canopy Plate and attach to Adaptor Plate with #8-32 screws.
4. Raise sign to Canopy Plate, connect LED lamp plug and insert excess wiring and plug into center cavity. Position lamp housing in Canopy, locating the slot in housing over raised lobe in Canopy, and tighten two set screws #6-32.

IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Disconnect AC power before servicing.
2. Refer to wiring diagram for proper connections.
3. All servicing should be performed by qualified personnel.
4. Consult your local building code for approved wiring and installation.
5. Do not use outdoors.
6. Do not use this equipment for other than intended use.
7. Do not let power cords touch hot surfaces.
8. Mount and secure the fixture at a location and height to avoid ready access and tampering by unauthorized persons.
9. The use of accessory equipment is not recommended by the manufacturer and may cause an unsafe condition.

SAVE THESE INSTRUCTIONS

Crystal Surface Mount Remote Edge-Lit Exit Sign


for Universal Central Battery System Series CBS

TOP MOUNT

Wall Mount
Installation
Series CRS-REC

REV 02.17.02

1. Follow WALL MOUNT steps 1-4.

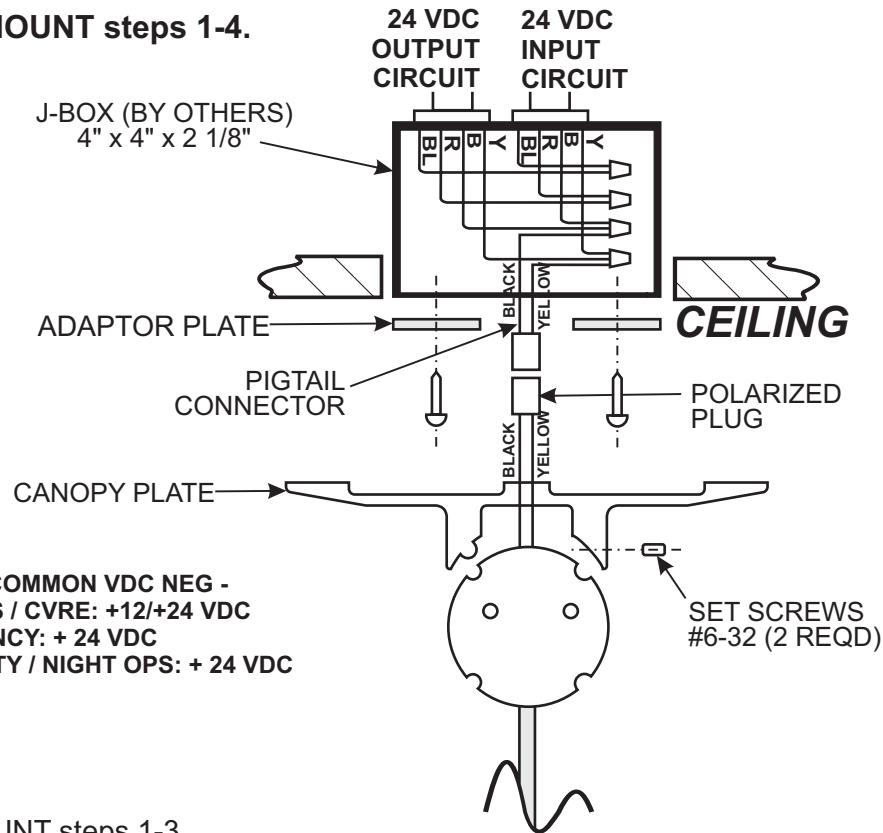


KEY

B BLACK: 12/24 COMMON VDC NEG -
Y YELLOW: EXITS / CVRE: +12/+24 VDC
R RED: EMERGENCY: + 24 VDC
BL BLUE: SECURITY / NIGHT OPS: + 24 VDC

END MOUNT

1. Follow WALL MOUNT steps 1-3.
2. Connect LED plug, route excess wire into j- box, and attach canopy with sign assembly to adaptor plate with 2 #8-32 color- matched screws supplied. Canopy should be flush with panel surface.

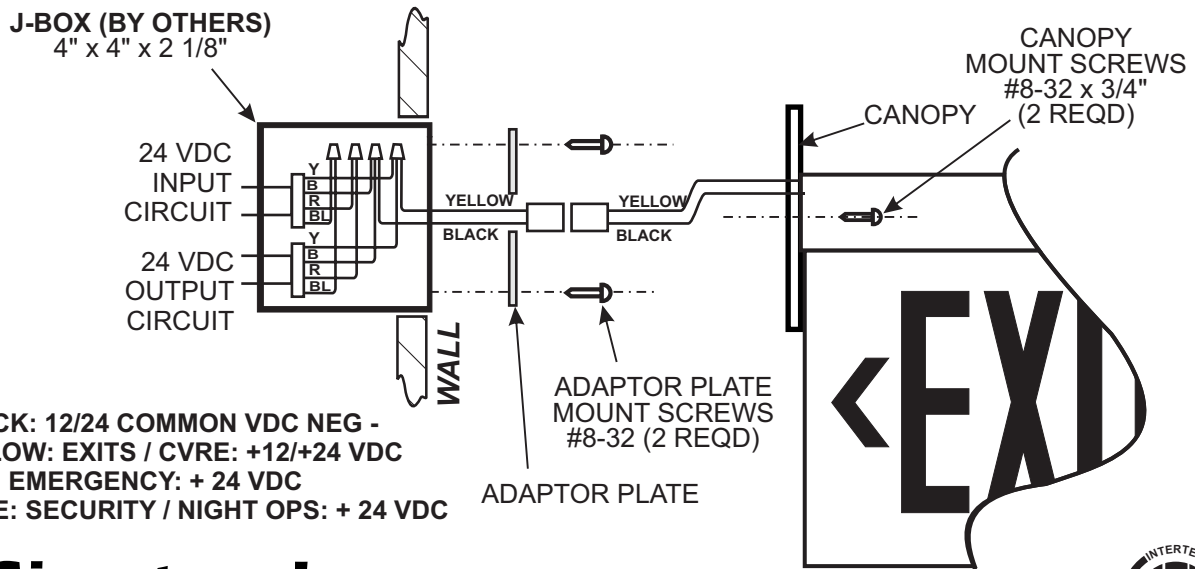

KEY

B BLACK: 12/24 COMMON VDC NEG -
Y YELLOW: EXITS / CVRE: +12/+24 VDC
R RED: EMERGENCY: + 24 VDC
BL BLUE: SECURITY / NIGHT OPS: + 24 VDC



Signtex Inc
LIGHTING

220 VFW Avenue, Grasonville, MD 21638
TEL: (410) 827-8300 Fax: (410) 827-8866
sales@signtexinc.com www.signtexinc.com

