


Installation Instructions & Users Manual

SURFACE BRACKET TOP MOUNT RECESSED J-BOX

Fig. 1

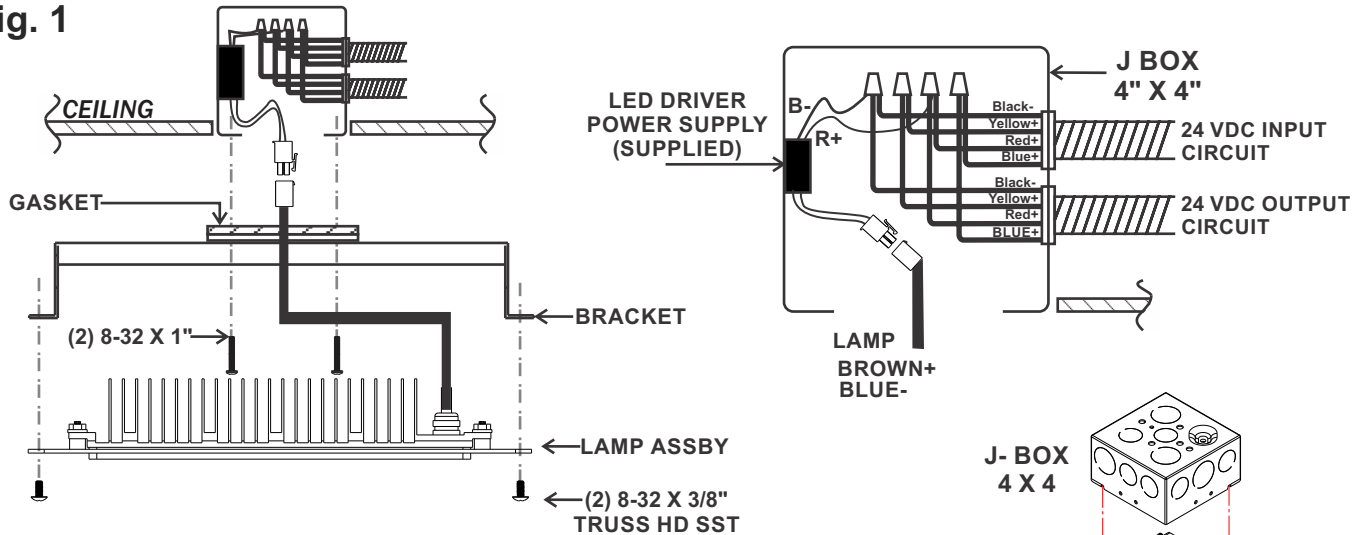

COLOR KEYS:

24V TERMINALS FROM BATTERY PANEL

B= BLACK:COMMON: NEG -

Y= YELLOW: EXITS/CVRE: +12/24 VDC

R= RED: EMERGENCY: +24VDC


BL= BLUE: NORMAL LIGHTING (NOL): +24 VDC

1. See Fig 1 for wiring details of LAMP connections. Identify mount position and install 4" x 4" J-Box. Route 24VDC wiring IN/OUT as shown and connect pigtail (supplied) with lamp plug. Connect Pigtail RED to +24VDC RED power input, and BLACK to -24VDC BLACK power input wiring with standard wire nuts.
2. Remove Lamp Assembly from mount bracket, Punch holes in the gasket in correct location to match j-box. Route pigtail plug through mount plate and secure bracket in position with (2) #8-32 screws. Ensure that gasket is in place correctly and tighten screws.

NOTE: If gaps appear around gasket, fill areas with silicone sealant.

3. Connect lamp plug from Lamp Assembly and push connector and extra wire cable through gasket into J-Box. Install (2) 8-32 x 3/8" Truss head screws to secure Lamp Assembly into bracket.
4. Supply 24VDC power from central battery or normal on/security power system to check lamp operation.

NOTE: Do not wire lamp without driver. This will damage the lamp

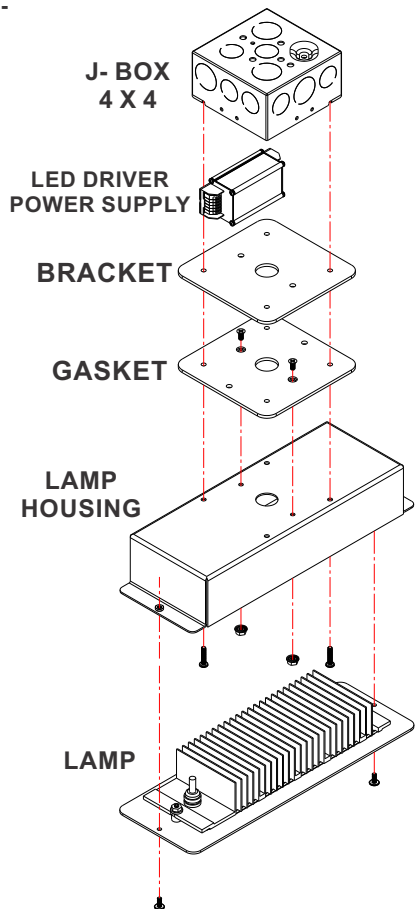


IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Disconnect AC power before servicing.
2. Refer to wiring diagram for proper connections.
3. All servicing should be performed by qualified personnel.
4. Consult your local building code for approved wiring and installation.
5. Do not use this equipment for other than intended use.
6. Do not let power cords touch hot surfaces.
7. Mount and secure the fixture at a location and height to avoid ready access and tampering by unauthorized persons.
8. The use of accessory equipment is not recommended by the manufacturer and may cause an unsafe condition.
9. Suitable for wet locations. See product label for temperature limitations.

SAVE THESE INSTRUCTIONS

SURFACE BRACKET TOP MOUNT WITH EXTERNAL J-BOX

EMERGENCY OPERATION ONLY

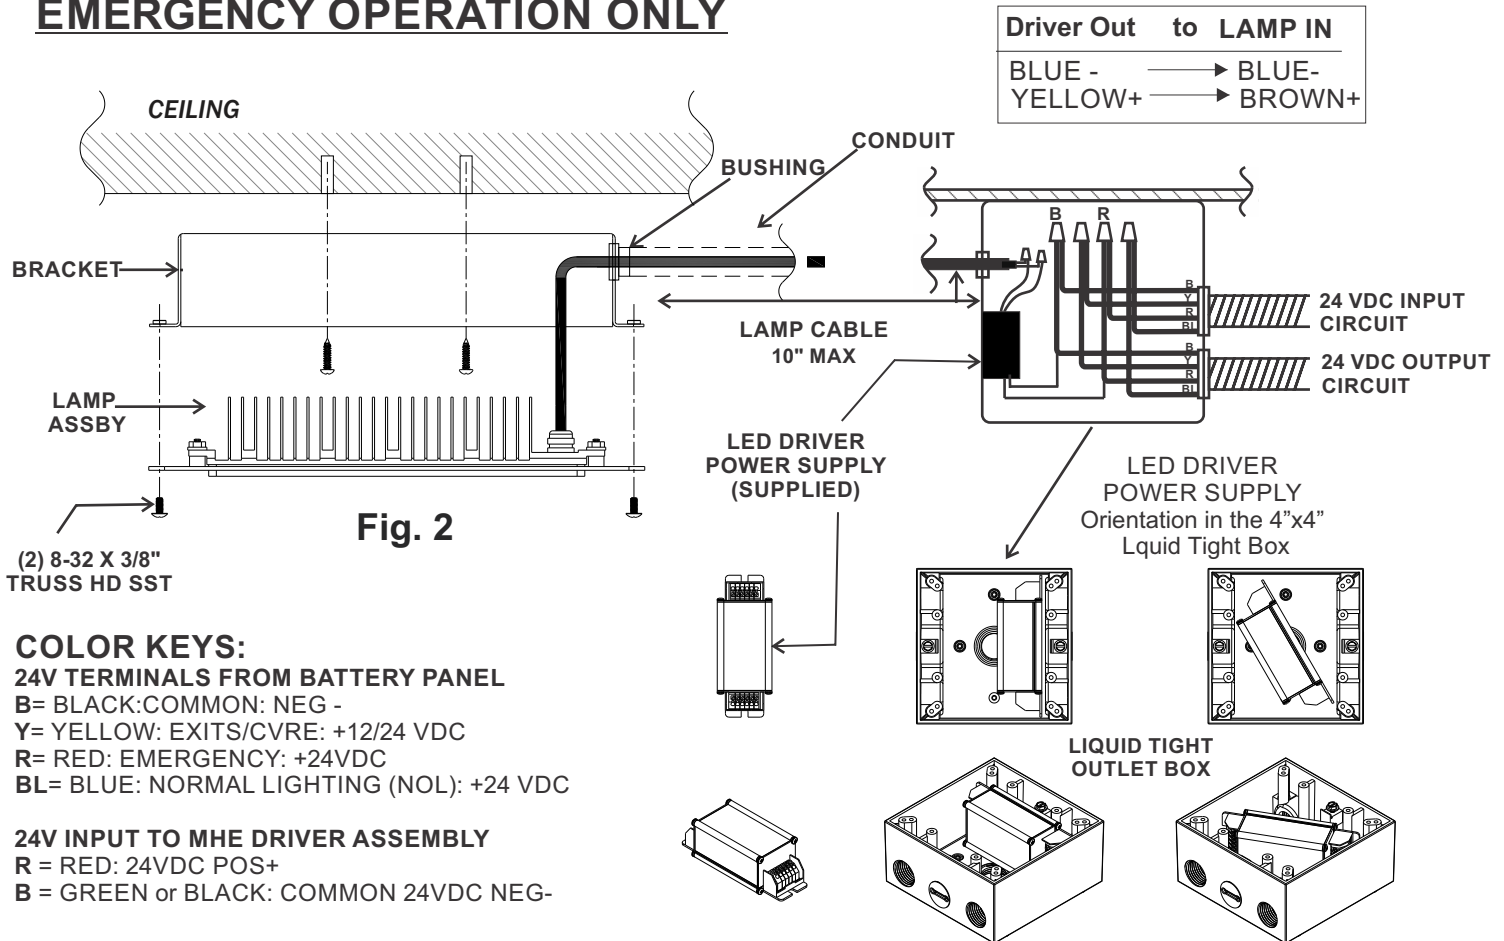

1. See Fig 2 and wiring details for Emergency Lighting Only, and Normal On Lighting Option. Identify mount position and install 4" x 4" LIQUID TIGHT J-Box near to fixture. Route 24 VDC wiring IN/OUT as shown and connect pigtail (supplied) with LED Driver.
2. Connect Lamp BLUE- to the Driver BLUE- and Brown+ to YELLOW+ of the LED Driver.

NOTE: Do not wire lamp without driver. This will damage the lamp.

3. Install screw anchors in mounting surface for (4) #8-32 screws to match holes provided in Bracket or Housing.
4. Remove Lamp Assembly and install (4) #8-32 screws to secure Bracket or Housing in position.
5. Secure lamp assembly to bracket with screws provided and route lamp cable through opening in end of bracket. Insert lamp cable through liquid tight bushing into LIQUID TIGHT j-box.
6. Connect RED +24V Driver wire to POSITIVE +24V power input circuit and BLACK -24V driver wire to COMMON NEGATIVE -24V power input circuit with standard wire nuts.
6. Supply 24VDC power from central battery or normal on/security power system to check lamp operation.

Pendant Mount Option (-PEN)

1. See Fig 3 for wiring details of LAMP connections. Identify mount position and install 4" x 4" J-Box. Route 24VDC wiring IN/OUT as shown and connect pigtail (supplied) with lamp plug. Connect Pigtail RED to +24VDC RED power input, and BLACK to -24VDC BLACK power input wiring with standard wire nuts.
2. Remove Lamp Assembly from mount bracket, Punch holes in the gasket at correct location to match j-box. Route pigtail plug through mount plate and secure bracket in position with (2) #8-32 screws. Ensure that gasket is in place correctly and tighten screws.

NOTE: If gaps appear around gasket, fill areas with silicone sealant.

3. Assemble lamp housing to pendant as shown.
Note : Max pendant height inside housing 1/4".

4. Connect lamp plug from Lamp Assembly and push connector and extra wire cable through gasket into J-Box. Install (2) 8- 32 x 3/8" Truss head screws to secure lamp assembly into bracket.



5. Supply 24VDC power from central battery or normal on/security power system to check lamp operation.

NOTE: Do not wire lamp without driver. This will damage the lamp


COLOR KEYS:

24V TERMINALS FROM BATTERY PANEL
 B= BLACK:COMMON: NEG -
 Y= YELLOW: EXITS/CVRE: +12/24 VDC
 R= RED: EMERGENCY: +24VDC
 BL= BLUE: NORMAL LIGHTING (NOL): +24 VDC

**POLARIZED
 WET LOCATION
 LAMP PLUG**

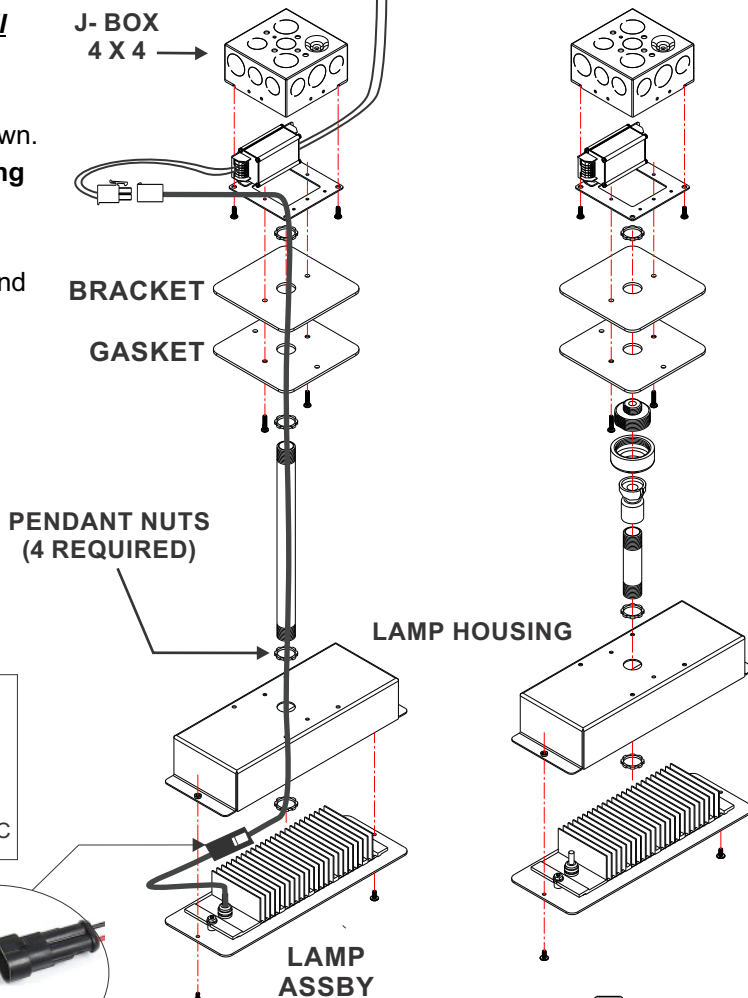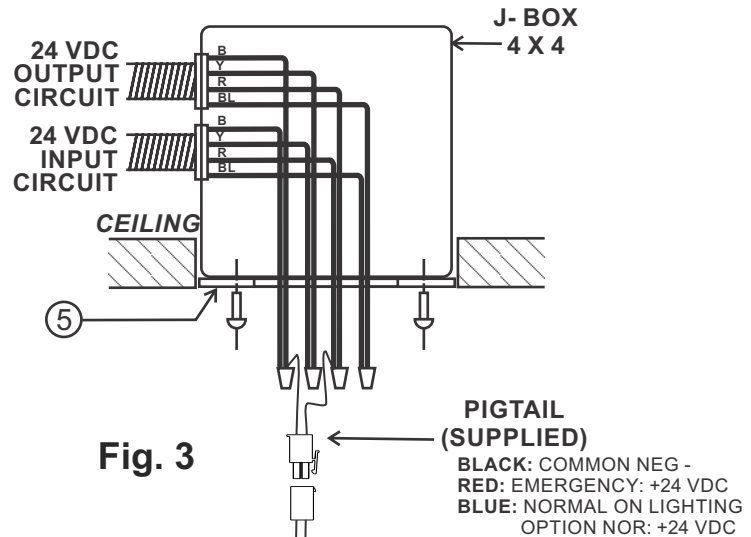

**Max pendant height
 inside housing**

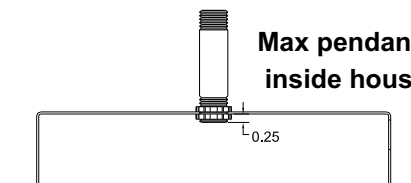

NOTES