

LED Indoor Thermoplastic Remote Head

FEATURES

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.0 watt (8 LEDs x 0.125 watt) per head.
- High performance chrome-plated metalized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provide optimal center-to-center spacing.
- Optional high lumen heads are 1.5 watts (12 LEDs x 0.125 watt per head) and provide increased center-to-center spacing.
- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

PROJECT:

TYPE:

CATALOG #:

PATHLITE
Series RHL
REV #: RHL.11.25.04



FIXTURE COMPATIBILITY TABLE

Refer to individual specification sheets to confirm remote load capacity

EBU & EXIT MODELS			
EML	ELP	RHO	CLP
CXT	RMC	CWL	HLC
CENTRAL BATTERY MODELS			
CBM	CBL	CBE	

CODES

- UL Listed for damp locations (0°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

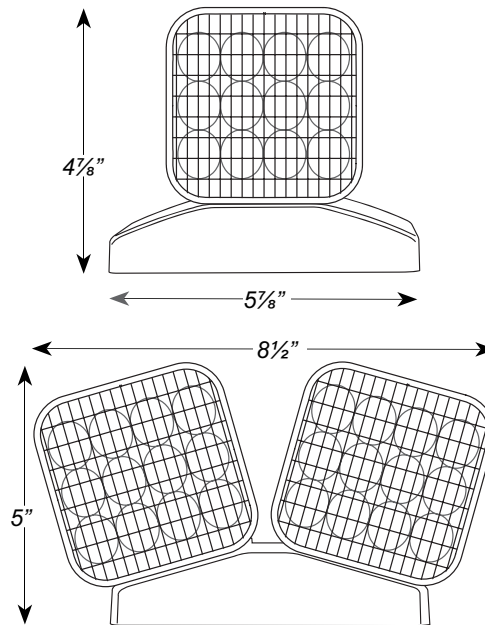
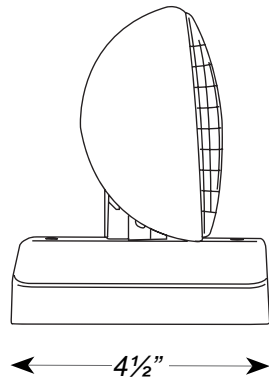
WARRANTY

- 5 year total customer satisfaction warranty.
For details see Signtex product catalog technical data section.

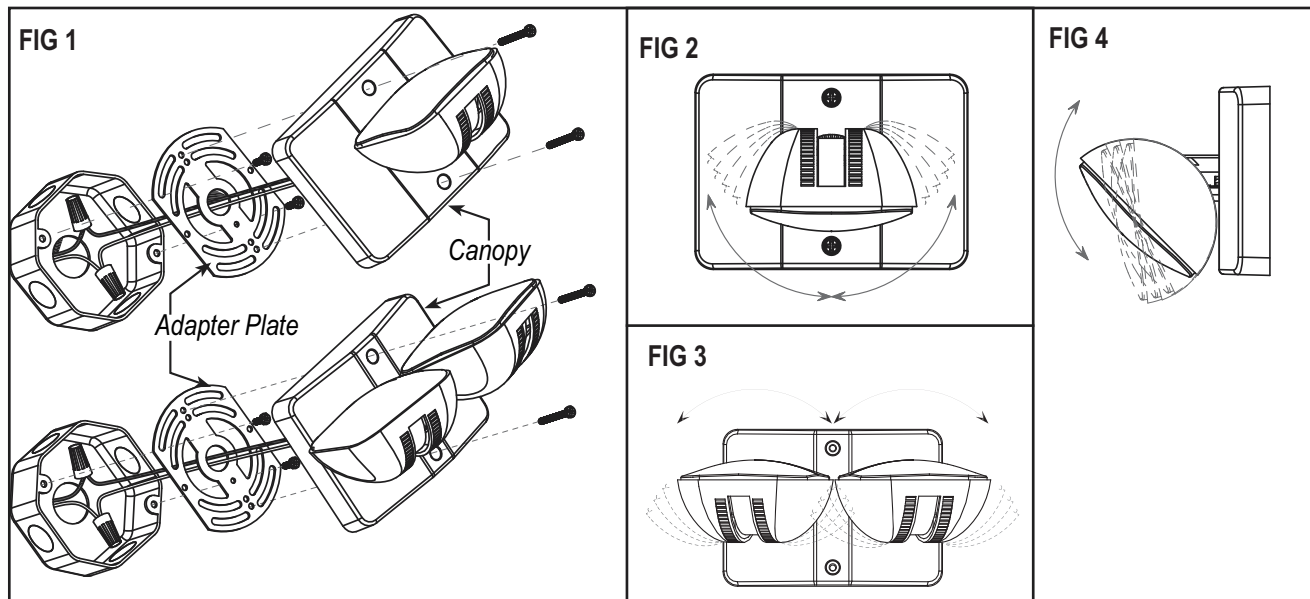


FIXTURE ORDERING INFORMATION EXAMPLE: RHLRB2B-HL

SERIES	OPERATION	LAMP HEADS	HOUSING COLOR	OPTIONS
RHL	RB Powered from EBU or EXIT Combo RE Powered from Central Battery System	1 Single Head 2 Double Head	(Blank) White B Black	(Blank) 1W per head HL 1.5W per head

DIMENSIONS

Canopy or mounting base to the junction box (not included). Use the adapter plate if required (FIG. 1). Heads can be rotated sideways (FIG. 2 & FIG. 3) or tilted up/down (FIG. 4) for proper orientation.

**DISTRIBUTOR**

Contact Sigtex for layout assistance.
Code compliant emergency lighting layouts provided!
Specifications and dimensions subject to change without notice.