

# Wet Location NEMA4X/NSF LED MR-16 Emergency Unit

## FEATURES

- Two fully adjustable, ultra bright 3.6 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.
- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Suitable for wall mount.
- Housing is reinforced polycarbonate construction in white or black finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockouts provided for conduit feed applications.

## ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 6V/12V maintenance-free, rechargeable NiCd battery (15W models).
- 6V/12V maintenance-free, rechargeable sealed lead acid battery (36W and 54W models).
- Offers 7.8W, 28.8W, 46.8W of remote capacity (6V/12V DC output) standard on the 15W, 36W and 54W models.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours (36 hours on the 54W model).

## WARRANTY / LISTING

- Five year warranty on all electronics and housing. Batteries prorated for two (lead acid) / five (NiCd) years.
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress protection.
- NEMA4X rated.
- UL certified for use in food service operations.
- UL listed for wet locations (0°C – 50°C on 15W 10°C – 40°C on 36W / 54W models).

## FIXTURE ORDERING INFORMATION EXAMPLE: WND615B-CW

WND	6	15	B	CW		
SERIES	BATTERY		POWER	HOUSING COLOR	OPTIONS	
<b>WND</b>	<b>6</b>	6 Volts	<b>15</b>	15Watts	<b>W</b> White	<b>SDT</b> Self-diagnostics
	<b>12</b>	12 Volts	<b>36</b>	36Watts	<b>B</b> Black	<b>CW</b> <sup>1</sup> Cold Weather
			<b>54</b>	54watts		<b>TP</b> Tamper-Proof

<sup>1</sup>Available only in 15W models

PROJECT:

TYPE:


CATALOG #:

**PATHLITE**  
**Series WND**

REV #: WND.05.26.02



## DIMENSIONS

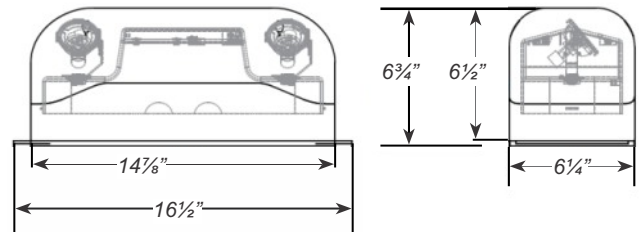

## STANDARD



## OPTIONAL

