

Thin Die-Cast Aluminum LED Exit Sign

FEATURES

- Ultra bright, energy efficient, long life Red or Green LEDs.
- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.
- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.
- Specification-grade, low profile, thin aluminum die-cast design

ELECTRICAL

- **AC Operation:** Dual 120/277 voltage.
- **DC Operation:**
Option **REC:** 24VDC for Central Battery systems.
Option **REP:** 48 & 60VDC for POE or DC power distribution systems.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- 2.4V Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
RPT-Red/Green/EM	1.0	1.0	0.10	0.10

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL listed for damp locations (0° – 50°C).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

STANDARD



PROJECT:


TYPE:

CATALOG #:

RAPIER
Series RPT
REV #: RPT.07.26.04



DIMENSIONS

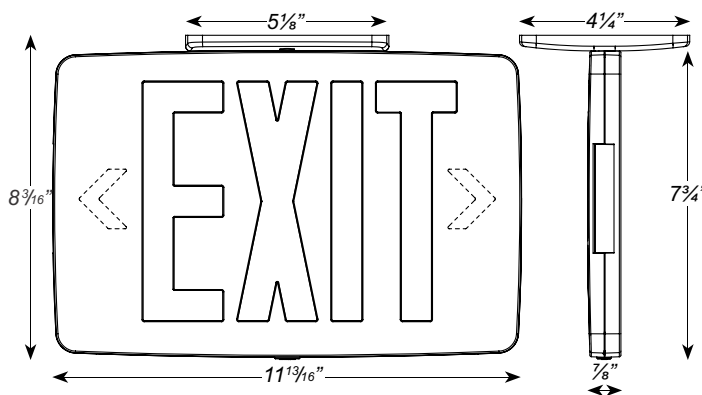

FIXTURE ORDERING INFORMATION EXAMPLE: RPDBB3RAA-SDT

RPT	BB	3	R	A	A	SDT
SERIES	OPERATION	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS	
RPT	BB Battery Backup NB No Battery(AC Only) REC Remote w/ Central Battery System REP Remote DC Power From Power Supply or POE system	1 Single Face 2 Double 3 Universal Single/Double	R Red G Green	A Aluminum W White B Black	48 48V DC input (REP Models) 60 60V DC input (REP Models) Vandal shield WG Wire Guard PF1 Polycarbonate Single Face PF2 Polycarbonate Double Face	

Special voltage options available. Check with your Signtex Lighting Representative.