

| | |
|------------|--|
| Project: | |
| Type: | |
| Catalog #: | |

STANDARD



OPTIONAL



ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125W) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity option available.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.


OPTIONS

- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- NH: No lamp head attached to the unit enabling it to be used as remote capable exit sign.
- Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in U.S. complies with "Assembled in USA" under the Buy American Act.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 40°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

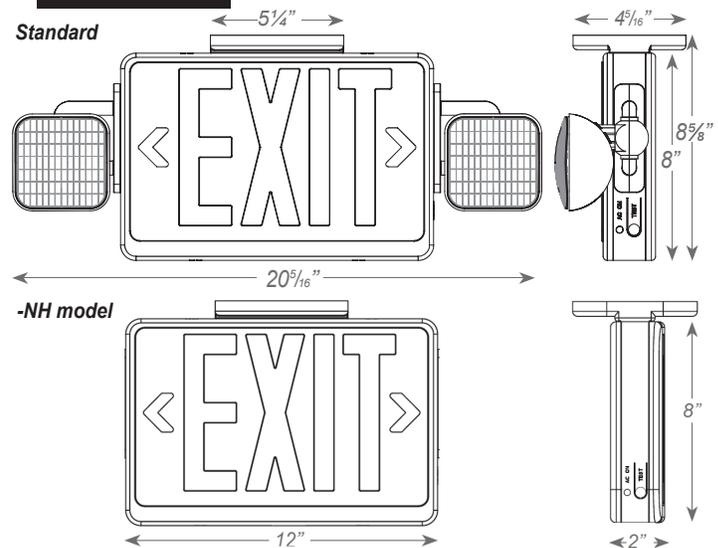

ORDERING INFORMATION

Sample Part Number: LEDCXTEU-2-R-W

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.

| MODEL | No. of FACES | LETTER COLOR | HOUSING COLOR | OPTIONS |
|----------|------------------------------------|--------------|---------------|-----------------------|
| LEDCXTEU | 2 Universal Single/ Double Face | R Red | W White | RC Remote Capacity |
| | | G Green | B Black | HL High Lumen |
| | | | | NH No Lamp Heads |
| | | | | SDT Self-diagnostics |
| | | | | CUSTOM Custom Wording |
| | | | | USA Assembled in USA |

| | |
|-------------------|--|
| Project: | |
| Type: | |
| Catalog #: | |

ELECTRICAL INFORMATION

| CATALOG NUMBER | INPUT WATTS (W) | | INPUT AMPS (A) | |
|------------------------------|-----------------|------|----------------|-------|
| | 120V | 277V | 120V | 277V |
| LEDCXTE-RED | 3.7 | 3.8 | 0.040 | 0.020 |
| LEDCXTE-GREEN/RC | 3.0 | 3.2 | 0.030 | 0.014 |
| LEDCXTE-RED-RC | 3.4 | 3.6 | 0.033 | 0.015 |
| LEDCXTE-RED/GREEN-SDT/RC-SDT | 5.2 | 5.7 | 0.046 | 0.022 |

REMOTE LAMP COMPATIBILITY

| MODEL NUMBER | BATTERY | REMOTE CAPACITY | COMPATIBLE REMOTE HEAD FAMILY | | | | | | | | | | | | |
|----------------|---------|-----------------|-------------------------------|-------|---------|------|-----|----|-----|-----|-----|-----|-----|--------|--|
| | | | MRHLED | RHLED | RH16LED | RH16 | | RH | | RHR | | SRH | | SRHLED | |
| | | | | MV | | 6V | 12V | 6V | 12V | 6V | 12V | 6V | 12V | | |
| LEDCXTEU-RC | 9.6V | 3W-4W | | X | X | | | | | | | | | | |
| LEDCXTEU-NH | 9.6V | 3W | | X | X | | | | | | | | | | |
| LEDCXTEU-RC-NH | 9.6V | 6W | | X | X | | | | | | | | | | |