

Surface Mount LED Down Light

This architectural housing design blends well with any environment. All parts are machined from extruded aluminum and can be custom finished at the factory to match any interior design plan.

FEATURES

- Operates with Central Battery System including low voltage normal lighting operation. (See CBS data sheet)
- Dual function operation for Night or Security lighting as well as emergency lighting.
- Over 50,000 hour lamp life in normal use.
- Self-Test Diagnostics is standard
- Normal-on switch allows timed control of night lighting
- Standard CRI 5000K.
- Universal 120/277 VAC input for standard battery or AC unit, or 24 VDC input for remote configuration.
- American manufactured major components comply with ARRA (American Recovery and Reinvestment Act) requirements and Buy American provisions.

CONSTRUCTION

- Housing and canopy plate from rugged extruded aluminum.
- Mounts cleanly with standard back plate to wall or ceiling, or direct to j-box for exposed conduit applications, such as unfinished ceilings.
- Standard satin white finish; custom paint or satin anodized finishes are also available.

ELECTRONICS

- Self-Test/Self-Diagnostic operation is standard in battery backup versions.
- Line latch circuit prevents unwanted emergency activation at installation.
- Low Voltage Disconnect prevents deep battery discharge
- High efficiency charger and Li-ion Battery
- Standard Operating Temperature
BB: 0°C to 50°C
AC & RE: -40°C to 50°C

PROJECT:
TYPE:
CATALOG #:

MOONLITE LED®

Series MLS

REV #: MLS.04.26.20



CODES

- Manufactured and tested to UL Standard 924, NFPA Life Safety Code101.

WARRANTY

- 10 year total customer satisfaction warranty.
 For details see Signtex product catalog technical data section.



FIXTURE ORDERING INFORMATION EXAMPLE: *MLSBB10W-DP*

SERIES	OPERATION	POWER	TRIM COLOR	OPTIONS
MLS	BB Battery Unit AC AC Supply (120/277V) RE Remote with Central Battery	BB & RE Models 7 = 7 Watts 10 = 10 Watts AC Models 4 = 4 Watts 7 = 7 Watts	W Satin White K Black A Aluminum B Dark Bronze X Custom	DAC Dual AC Input (AC Models Only) DP Damp Location PEN12 12" Pendant Mount PENX X= Custom Pendant length SV Pendant Swivel Mount SMJ Surface Mount to J- Box WM Wall Mount

SUGGESTED SPECIFICATIONS:

Install MOONLITE® Series MLS Surface Mount LED down light emergency lighting fixture manufactured by Sigtex Inc., available as unit equipment or as a remote device connected to a central battery power source. Upon loss of AC building power, emergency models shall operate for a minimum of 90 minutes in compliance with UL 924 and NFPA LSC Code 101. The unit may be specified to operate continuously for security or night lighting, as required. The battery charger and power supply shall have universal input of 120/277 VAC, with brownout and LVD circuit protection. Auto battery diagnostics shall be available for all models, as specified and shall perform all test functions specified by UL 924 and NFPA 101.

SPACING


Average Illuminance 1 Fc

Model	Mtg. Ht.	SPACING		
		Path of Egress Width		
		3 Ft.	6 Ft.	10 Ft.
7 W	9'	50'	40'	25'
10 W	9'	55'	50'	40'






NOTE: TESTED IN ACCORDANCE WITH IES STANDARD LM-79-08 FOR SOLID STATE LIGHTING PRODUCTS. FOR REFERENCE ONLY. STANDARD REFLECTANCES 80/50/20. SIGTEX IS NOT RESPONSIBLE FOR SPECIFIC CONDITIONS THAT MAY ALTER THE RESULTS. COMPLETE IES PHOTOMETRIC DATA AVAILABLE AT WWW.SIGTEXINC.COM FOR YOUR CONVENIENCE.

CONTACT SIGTEX FOR LAYOUT ASSISTANCE

Code Compliant Emergency lighting layouts provided free of charge!

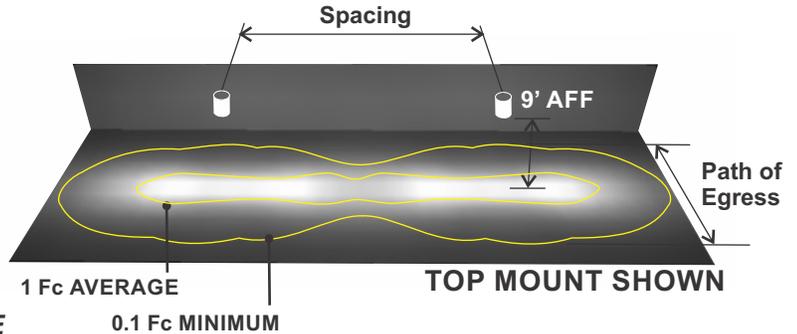

MOUNTING DATA & DIMENSIONS:

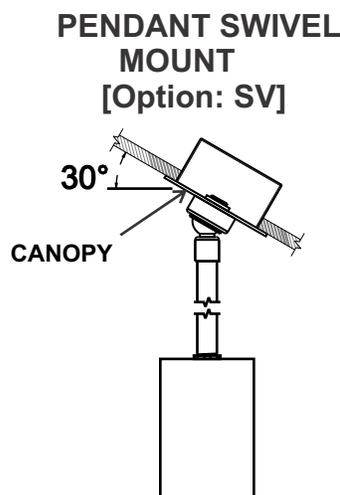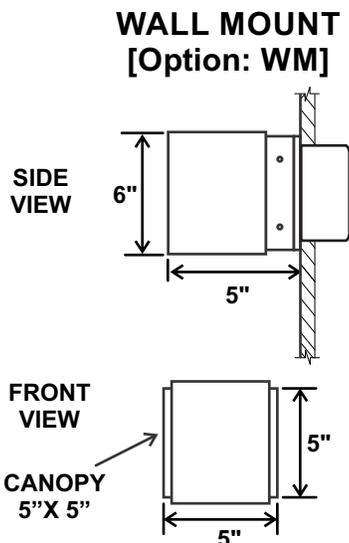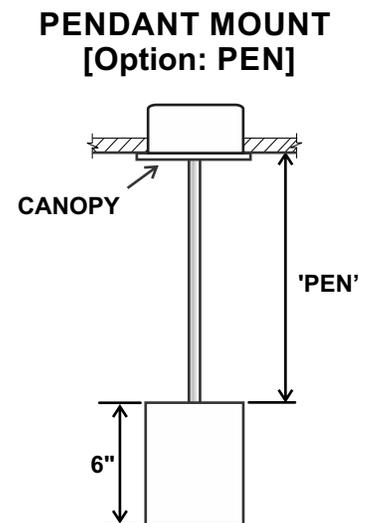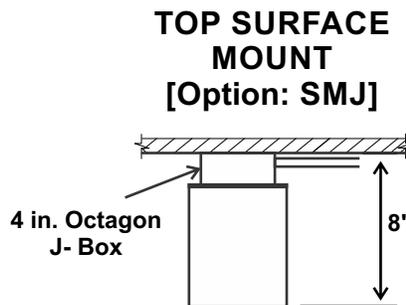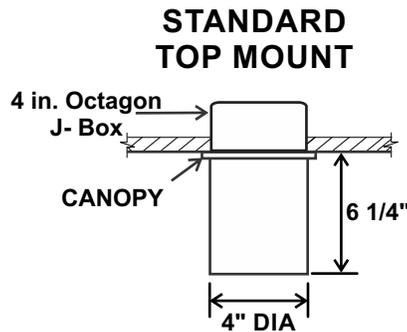

SELF-TEST DIAGNOSTIC FUNCTIONS BB MODELS

STATUS	LED DISPLAY
NORMAL FULL CHARGE	GREEN ON
NORMAL FAST CHARGE	ORANGE ON
FAILED BATTERY	RED FLASH FAST
FAILED LAMP	GREEN FLASH
FAILED TRANSFER	ORANGE FLASH
FAILED CHARGER	RED FLASH SLOW