

Project:	
Type:	
Catalog #:	

STANDARD



ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- 0.5 watt (1 LEDs x 0.5 watt) per head.
- Unique all-inclusive lamp, diffuser and lens assembly.
- Adjustable LED lamp heads provide optimal center-to-center spacing.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

HOUSING


- Engineering grade, high-impact resistant polycarbonate housing.
- Sealed and gasketed in standard gray or black finish.

WARRANTY / LISTING

- Five year warranty.
- cULus Listed for wet locations (-30°C - 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.



DIMENSIONS

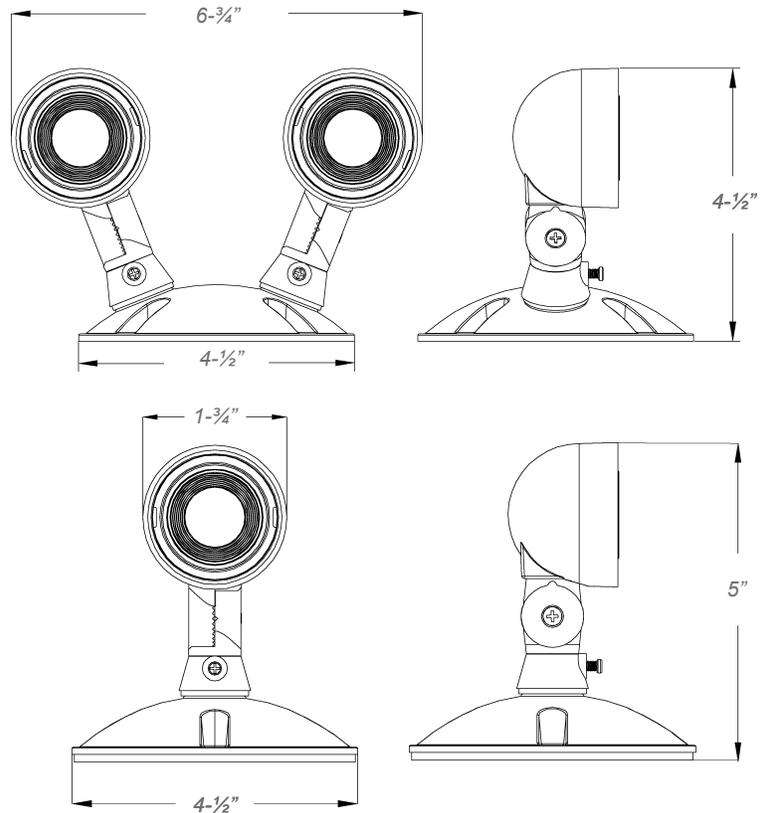

FIXTURE COMPATIBILITY LIST

Reference individual unit equipment specification sheets for remote load capacity availability.

Best Lighting Model Type		
CEU-RC	CKXTE-RC	EM-RC
CEM-RC	E-1-RC	CTXTE-RC

ORDERING INFORMATION

Sample Part Number: MRHLED1-PWP-3.6V

MODEL	No. of HEADS	COLOR	HOUSING	VOLTAGE
MRHLED	1 Single Head	(blank) Gray	PWP Thermoplastic	3.6V For Use With 3.6V DC Power Source
	2 Double Head	B Black		