


|            |  |
|------------|--|
| Project:   |  |
| Type:      |  |
| Catalog #: |  |

### STANDARD



### OPTIONAL



### ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- 3.6W (3 LEDs x 1.2 watt) per head.
- Adjustable LED lamp heads provide optimal center-to-center spacing.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.

### ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 6V long life, maintenance free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lampheads for minimum 90-minute emergency illumination.
- Fully automatic solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Die-cast aluminum mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount.

### HOUSING

- 5VA flame retardant, UV stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV stabilized polycarbonate clear lens.
- Corrosion resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.


### OPTIONS

- CW: Optional internal heater and battery blanket for extreme cold temperature applications (-20°C – 50°C).
- RC: Remote capacity of up to 7.2 watts.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.
- Custom: Signs available with requested "special" wording.

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

### DIMENSIONS

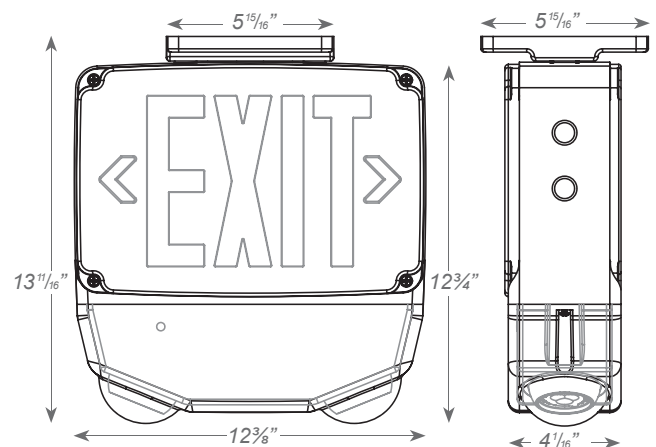

### ORDERING INFORMATION

Sample Part Number: **CWLEZXTEU1RW**

| MODEL     | No. of FACES  | LETTER COLOR | HOUSING COLOR                 | OPTIONS                |
|-----------|---------------|--------------|-------------------------------|------------------------|
| CWLEZXTEU | 1 Single Face | R Red        | W White                       | CW Cold Weather        |
|           | 2 Double Face | G Green      | B Black                       | RC Remote Capacity     |
|           |               |              | G Gray (with white faceplate) | SDT Self Diagnostics   |
|           |               |              |                               | TP Tamper Proof Screws |
|           |               |              |                               | CUSTOM Custom Wording  |

|                   |  |
|-------------------|--|
| <b>Project:</b>   |  |
| <b>Type:</b>      |  |
| <b>Catalog #:</b> |  |

### REMOTE LAMP COMPATIBILITY

Reference remote lamp head specification sheets for complete catalog number ordering information.

| MODEL NUMBER | BATTERY | REMOTE CAPACITY | COMPATIBLE REMOTE HEAD FAMILY |       |         |      |     |    |     |     |     |     |     |        |
|--------------|---------|-----------------|-------------------------------|-------|---------|------|-----|----|-----|-----|-----|-----|-----|--------|
|              |         |                 | MRHLED                        | RHLED | RH16LED | RH16 |     | RH |     | RHR |     | SRH |     | SRHLED |
|              |         |                 |                               | MV    |         | 6V   | 12V | 6V | 12V | 6V  | 12V | 6V  | 12V |        |
| CWLEZXTE     | 6V      | 7.2W            |                               | X     | X       | X    |     | X  |     | X   |     | X   |     | X      |

### CENTER-TO-CENTER SPACING GUIDELINES

For reference only.



|   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |    |
|---|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|
| 1 | 0.30 | 0.43 | 0.59 | 0.76 | 0.98 | 1.22 | 1.37 | 1.37 | 1.21 | 0.97 | 0.74 | 0.70 | 0.75 | 0.92 | 1.09 | 1.13 | 1.04 | 0.89 | 0.68 | 0.50 | 0.34 | 0.24 | 0.20 | 0.14 |    |
| 2 | 0.36 | 0.50 | 0.77 | 1.02 | 1.26 | 1.51 | 1.69 | 1.60 | 1.43 | 1.15 | 0.89 | 0.83 | 0.93 | 1.20 | 1.51 | 1.67 | 1.57 | 1.33 | 1.03 | 0.71 | 0.52 | 0.35 | 0.24 | 0.18 |    |
| 3 | 0.43 | 0.60 | 0.82 | 1.20 | 1.51 | 1.77 | 1.90 | 1.84 | 1.53 | 1.20 | 0.95 | 0.89 | 1.03 | 1.44 | 1.78 | 1.93 | 1.84 | 1.50 | 1.15 | 0.78 | 0.55 | 0.38 | 0.27 | 0.20 |    |
| 4 | 0.42 | 0.60 | 0.85 | 1.13 | 1.44 | 1.70 | 1.82 | 1.70 | 1.38 | 1.12 | 0.89 | 0.87 | 1.05 | 1.50 | 1.83 | 2.09 | 2.00 | 1.68 | 1.26 | 0.94 | 0.66 | 0.40 | 0.31 | 0.23 |    |
| 5 | 0.44 | 0.61 | 0.80 | 1.06 | 1.29 | 1.45 | 1.50 | 1.40 | 1.12 | 0.96 | 0.78 | 0.78 | 0.97 | 1.34 | 1.70 | 1.93 | 1.87 | 1.61 | 1.25 | 0.91 | 0.67 | 0.48 | 0.32 | 0.23 |    |
| 6 | 0.37 | 0.54 | 0.69 | 0.86 | 1.05 | 1.10 | 1.12 | 1.04 | 0.87 | 0.70 | 0.62 | 0.64 | 0.80 | 1.06 | 1.34 | 1.58 | 1.55 | 1.37 | 1.12 | 0.90 | 0.68 | 0.50 | 0.34 | 0.24 |    |
|   | 12   | 11   | 10   | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 10   | 11   | 12 |

Meets NFPA 101 Requirements for: 24'+ center-to-center spacing - 6'+ path of egress 0' from wall - 9' mounting height.

### ELECTRICAL INFORMATION

| CATALOG NUMBER        | INPUT WATTS (W) |       |      |        | INPUT AMPS (A) |        |       |        |
|-----------------------|-----------------|-------|------|--------|----------------|--------|-------|--------|
|                       | 120V            |       | 277V |        | 120V           |        | 277V  |        |
| CWLEZXTEU-R           | 5.7             |       | 5.7  |        | 0.057          |        | 0.024 |        |
| CWLEZXTEU-R-CW        | 5.7             | 33.3* | 5.7  | 146.9* | 0.057          | 0.286* | 0.024 | 0.535* |
| CWLEZXTEU-R-RC        | 9.0             |       | 9.0  |        | 0.082          |        | 0.034 |        |
| CWLEZXTEU-R-RC-CW     | 9.0             | 35.0* | 9.0  | 148.5* | 0.082          | 0.300* | 0.034 | 0.540* |
| CWLEZXTEU-R-SDT       | 7.0             |       | 7.0  |        | 0.063          |        | 0.030 |        |
| CWLEZXTEU-R-CW-SDT    | 7.0             | 33.6* | 7.0  | 147.2* | 0.063          | 0.288* | 0.030 | 0.536* |
| CWLEZXTEU-R-RC-SDT    | 9.7             |       | 9.7  |        | 0.088          |        | 0.039 |        |
| CWLEZXTEU-R-RC-CW-SDT | 9.7             | 35.3* | 9.7  | 148.8* | 0.088          | 0.302* | 0.039 | 0.541* |
| CWLEZXTEU-G           | 5.7             |       | 5.7  |        | 0.057          |        | 0.024 |        |
| CWLEZXTEU-G-CW        | 5.7             | 33.3* | 5.7  | 146.8* | 0.057          | 0.286* | 0.024 | 0.534* |
| CWLEZXTEU-G-RC        | 9.0             |       | 9.0  |        | 0.082          |        | 0.034 |        |
| CWLEZXTEU-G-RC-CW     | 9.0             | 34.9* | 9.0  | 148.5* | 0.082          | 0.299* | 0.034 | 0.540* |
| CWLEZXTEU-G-SDT       | 7.0             |       | 7.0  |        | 0.063          |        | 0.030 |        |
| CWLEZXTEU-G-CW-SDT    | 7.0             | 33.6* | 7.0  | 147.1* | 0.063          | 0.288* | 0.030 | 0.535* |
| CWLEZXTEU-G-RC-SDT    | 9.7             |       | 9.7  |        | 0.088          |        | 0.039 |        |
| CWLEZXTEU-G-RC-CW-SDT | 9.7             | 35.2* | 9.7  | 148.8* | 0.088          | 0.301* | 0.039 | 0.541* |

\*At extreme temperatures, with the heater activated