

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

AC Operation

- Universal Input 120/277VAC
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V long life, maintenance-free, rechargeable NiCd battery (BB models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

DC Operation

- 24VDC for Central Storage Battery systems.
- 60VDC for POE or DC power distribution systems.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Specification-grade, low profile thin plastic design.
- EZ snap-out Chevron directional indicators.
- Patented, field selectable universal single/ double face configuration.

OPTIONS

- DC Operation.

WARRANTY/ LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

STANDARD



PROJECT:


TYPE:

CATALOG #:



U.S. Patent No.#'s:
9,990,868
D825,003

DIMENSIONS

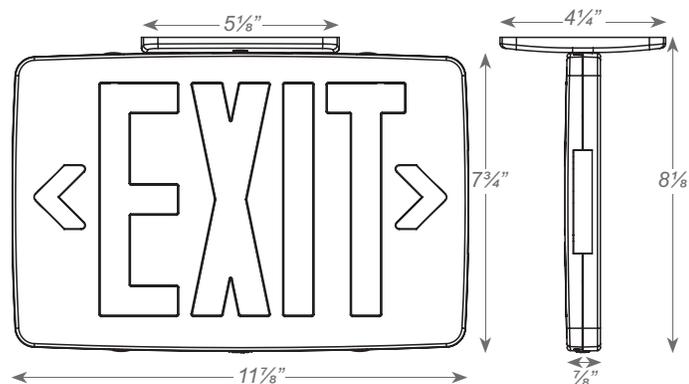

FIXTURE ORDERING INFORMATION

EXAMPLE: BLTBB3RWBB

BLT

3

SERIES	OPERATION	No.OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
BLT	BB 120/277 Battery Backup	3 Univ. Single/ Double	R Red	W White	48 48 VDC Input* 60 60 VDC Input*
	NB AC Only		G Green	B Black	
	REC Power from Central Battery				
	REP Power from DC Power Supply or POE				

ELECTRICAL INFORMATION

MODEL NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
BLT	1.0	1.0	0.10	0.10