

PROJECT:
TYPE:
CATALOG #:

LED Outdoor Egress Emergency with Night Lighting Option

MOONLITE LED®

Series WPM

REV #: WPM.03.26.01




FEATURES

- Operates with Central Battery System including low voltage normal lighting operation. (See CB System data sheet)
- Dual function operation for Night or Security lighting as well as emergency lighting.
- Premium powder-coat, die-cast aluminum, Bronze housing.
- Polycarbonate lens.
- Provides a range of 2,009 to 3,923 nominal lumens.*
- Long-life LEDs provide 153,000 hours of operation with at least 70% of initial lumen output (L70), and 46,000 hours with at least 90% of initial lumen output (L90).**
- LED chromaticity based on < 6-step ANSI quadrangles.
- LED color maintenance < -0.0021 chromaticity shift ($\Delta u'v'$) over the initial 6,000 hours of operation.
- Color Rendering Index > 90
- Provides 1421 nominal lumens at 10 Watts, provides 2,132 nominal lumens at 15 Watts and provides 2857 nominal lumens at 20 watts models.
- Operating temperature (ambient): -30°C to 50°C (-22°F to 122°F).



DIMENSIONS

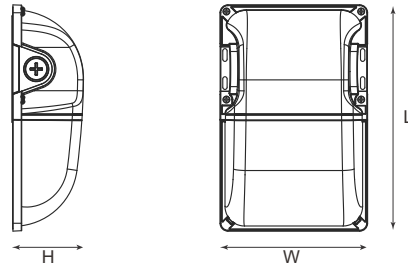

CODES COMPLIANCE

- cETLus listed for wet locations.
- DLC premium listed
- IP65 rated for ingress protection.
- IK08 rated for impact protection.

WARRANTY

- 5 year total customer satisfaction warranty. For details see Signtex product catalog technical data section.

Model #	L (in)	W (in)	H (in)	Weight (lbs)
WPE-4L-SLSK	9.06	5.91	2.87	1.48

* Default kelvin temperature 4000k and highest lumen output.
** L70 & L90 hours are IES TM-21-11 calculated hours.



FIXTURE ORDERING INFORMATION EXAMPLE: WPE20RE5K - NOR

SERIES	POWER	OPERATION	COLOR TEMP	HOUSING COLOR	OPTIONS
WPE	10 10W 15 15W 20 20W	RE 24V Remote from Central Battery system.	5K 5000K	(Blank) Dark-Bronze W White K Black A Aluminum X Custom	NOR Security Lighting PH Photocell Lighting Control (NOR option required)