

Chicago Approved Edgelit Aluminum Exit/Stair Signs

FEATURES

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination.
- Die-cast aluminum mounting canopy provided for universal top, end or back mount.
- Premium-grade, extruded aluminum housing (also available in optional white powder-coated finish).
- Single or double face configurations

ELECTRICAL

- Dual 120V/277 voltage.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

WARRANTY / LISTING

- Five year warranty on all electronics and housing.
- Battery prorated for five years.
- UL listed for damp locations (0° – 50°C).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.
- Certified to CEC under Title 20 Regulations

STANDARD




PROJECT:
TYPE:
CATALOG #:

GUARDLITE
Series CLX
 REV #: CLX.03.26.02



DIMENSIONS

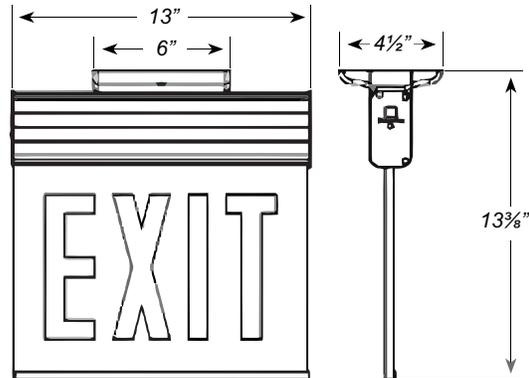

FIXTURE ORDERING INFORMATION EXAMPLE: CLXBB2RWA-DA

CLX	BB	2	RW	A	-DA
SERIES	OPERATION	NO. OF FACES	LETTER COLOR	HOUSING COLOR	SIGNAGE / DIRECTIONAL ARROWS
CLX	BB Battery Backup AC AC Only RE Remote with Central Battery	1 Single Face 2 Universal Single/Double	RW Red On White	A Aluminum W White	-NA Exit No Arrow -S-NA Stair No Arrow -DA Exit Double Arrow -S-DA Stair Double Arrow -RA ¹ Exit Right Arrow -S-RA ¹ Stair Right Arrow -LA ¹ Exit Left Arrow -S-LA ¹ Stair Left Arrow -LARA ² Exit Left/Right Arrow -S-LARA ² Stair Left/Right Arrow

¹ Available in single face configuration only.
² Available in double face configuration only


ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
		277V	120V	277V
AC Model	4.3	4.7	0.04A	0.02A
BB Model	4.3	4.7	0.04A	0.02A

ARROW CONFIGURATION

SINGLE FACE

DOUBLE FACE

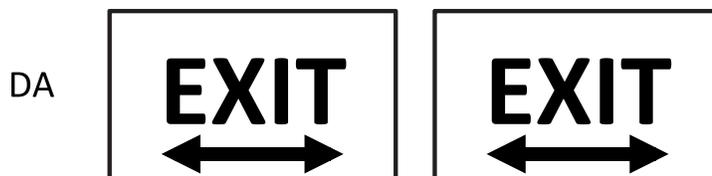

DISTRIBUTOR

Contact Sigtex for layout assistance.
Code compliant emergency lighting layouts provided!
Specifications and dimensions subject to change without notice.