

# LED Hazardous Location Remote Head

## FEATURES

- Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing..
- Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided).
- Housing is fiberglass reinforced construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws
- OPTION: TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

## MOUNTING

- Die-cast mounting brackets provided for surface wall-mount installation.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.

PROJECT:

TYPE:

CATALOG #:

**PATHLITE**  
**Series HRL**  
REV #: HRL.09.25.01



## FIXTURE COMPATIBILITY TABLE

Refer to individual specification sheets to confirm remote load capacity

EBU & EXIT MODELS			
CAD	CAL	CAR	CWL
DXR	RMR	CEM	IND
HLE	HLC		
CENTRAL BATTERY MODELS			
CBM	CBL	CBE	


## CODES

- UL Listed with approved Signtex Products.
- IP66 rated for Ingress protection.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Rated for Class 1, Division 2, Groups A, B, C, and D.

## WARRANTY

- 5 year total customer satisfaction warranty.
- For details see Signtex product catalog technical data section.


### STANDARD



### OPTIONAL



## DIMENSIONS

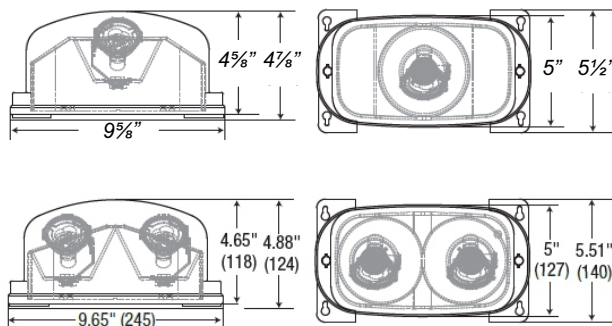

## FIXTURE ORDERING INFORMATION EXAMPLE: HRLRB2G-TP

SERIES	OPERATION	LAMP HEADS	COLOR	OPTIONS
HRL	RB Powered from EBU or EXIT Combo RE Powered from Central Battery System	1 Single Head 2 Double Head	G Gray	TP Tamper-proof