

### **LED Indoor Thermoplastic Remote Head**

#### **FEATURES**

- · Long lasting, efficient, ultra bright white LED lamp heads.
- 1.0 watt (8 LEDs x 0.125 watt) per head.
- High performance chrome-plated metalized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provide optimal center-tocenter spacing.
- Optional high lumen heads are 1.5 watts (12 LEDs x 0.125 watt per head) and provide increased center-to-center spacing.
- Powered from low voltage power source with low voltage wiring (not provided).

#### **MOUNTING**

- · Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

# **PATHLITE** Series RHL-Indoor REV #: RHL.09.25.02

PROJECT:

CATALOG #:

TYPE:





#### FIXTURE COMPATIBILITY TABLE

Refer to individual specification sheets to confirm remote load capacity

EBU & EXIT MODELS						
EML	ELP	RHO	CLP			
CXT	RMC	CWL	HLC			
CENTRAL BATTERY MODELS						
СВМ	CBL	CBE				



#### CODES

- UL Listed for damp locations (0°C 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

#### **WARRANTY**

· 5 year total customer satisfaction warranty. For details see Signtex product catalog technical data section.





#### FIXTURE ORDERING INFORMATION EXAMPLE: RHLRB2B-HL HL

RHL RB


SERIES	OPERATION	LAMP HEADS	HOUSING COLOR	OPTIONS
RHL	RB Powered from EBU or EXIT Combo RE Powered from Central Battery System	<ol> <li>Single Head</li> <li>Double Head</li> </ol>	(Blank) White B Black	(Blank) 8 LEDs 1W HL 12 LEDs 1.5W




## Series RHL-Indoor


EV #: RHL.09.25.02

### **DIMENSIONS**



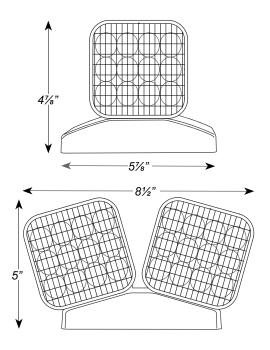

Canopy or mounting base to the junction box (not included). Use the adapter plate if required (FIG. 1). Heads can be rotated sideways (FIG. 2 & FIG. 3) or tilted up/down (FIG. 4) for proper orientation.

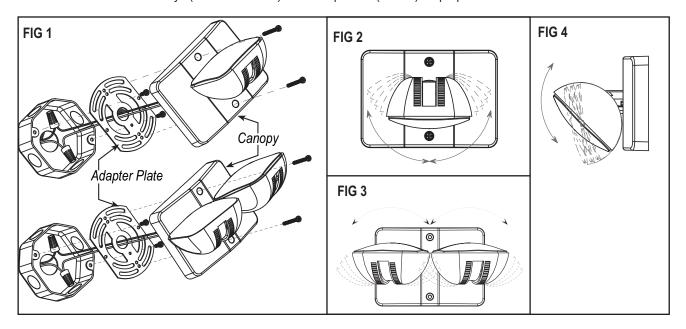

**DISTRIBUTOR** 

Contact Signtex for layout assistance.

Code compliant emergency lighting layouts provided!

Specifications and dimensions subject to change without notice.