

## New York City Compliant Diecast Aluminum Exit Sign

### FEATURES

- Ultra bright, energy efficient, long life Red LED exit sign illumination.
- New York City compliant 8" EXIT letters.
- Aluminum mounting canopy included for top, end or back mount.
- Premium-grade, extruded aluminum housing available in black or white powder-coated finishes.
- Universal knockout pattern on back plate for wall mount.
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.

#### Options:

- **REC:** 12/24VDC input for Central Storage Battery systems.
- **REP:** 48-60VDC for POE or DC power distribution systems.
- **SDT:** Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

### ELECTRICAL

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

| CATALOG NUMBER | INPUT WATTS (W) |      | INPUT AMPS (A) |       |
|----------------|-----------------|------|----------------|-------|
|                | 120V            | 277V | 120V           | 277V  |
| NYK-BB         | 5.0             | 5.0  | 0.041          | 0.018 |

PROJECT:


TYPE:

CATALOG #:

**GUARDLITE**  
**Series NYK**  
REV #: NYK.09.26.02



### DIMENSIONS

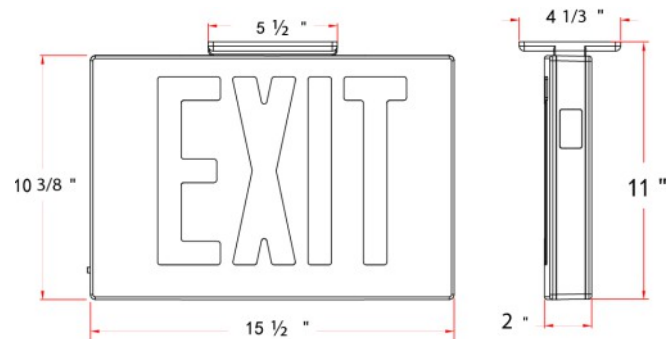

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

#### STANDARD



#### OPTIONAL



### FIXTURE ORDERING INFORMATION EXAMPLE: NYK-BB-3RWW-W-SDT

| NYK    | BB                                                                                                                                         | 3                                                           | R            | W                                | W                                | SDT                               |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|--------------|----------------------------------|----------------------------------|-----------------------------------|
| SERIES | OPERATION                                                                                                                                  | NO. OF FACES                                                | LETTER COLOR | PANEL                            | HOUSING COLOR                    | OPTIONS                           |
| NYK    | BB Battery Backup<br>NB No Battery(AC Only)<br>REC Remote w/ Central Battery System<br>REP Remote DC Power From Power Supply or POE system | 1 Single Face<br>2 Double Face<br>3 Universal Single/Double | R Red        | W White<br>B Black<br>A Aluminum | W White<br>B Black<br>A Aluminum | SDT <sup>1</sup> Self-Diagnostics |

<sup>2</sup> Available only with BB units.