

Chicago Approved Steel LED Emergency Unit

FEATURES

- Two, 6V adjustable white LED lamp heads in metal housing and PC lens provide optimal light distribution.
- 3.3W (3 LEDs x 1.1W) per head with a light output of 335 lumens
- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.
- Durable 20-gauge steel construction.
- White or black finish.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to the LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 5.4W standard.

CODES

- UL Listed for damp locations (20°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets City of Chicago requirements.

WARRANTY

- 5 year total customer satisfaction warranty.
For details see Signtex product catalog technical data section.

STANDARD



FIXTURE ORDERING INFORMATION EXAMPLE: CHI-BB-B

CHI - BB - B

SERIES	OPERATION	HOUSING COLOR
CHI	BB Battery Unit	W White B Black

PROJECT:


TYPE:

CATALOG #:

PATHLITE
Series CHI
REV #: CHI.06.26.01



DIMENSIONS

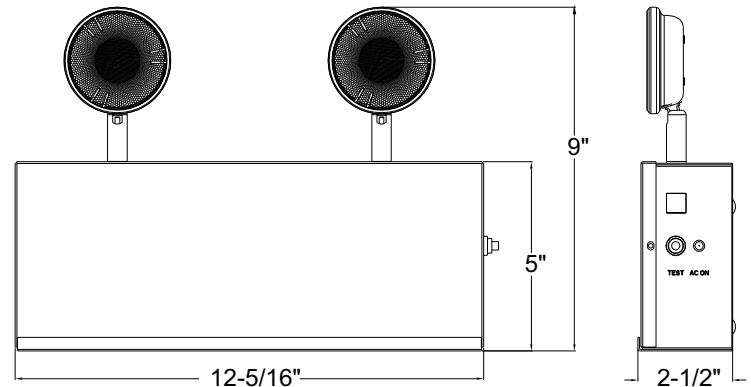

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
CHI-BB	8.4	9.4	0.08A	0.04A

REMOTE LAMP COMPATIBILITY

MODEL	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY		
CHI-BB	6V	5.4W	RHL	HRL	SRL