

LED Outdoor Polycarbonate/ Die-Cast Remote Head

FEATURES

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.0 watt (8 LEDs x 0.125 watt) per head.
- High performance chrome-plated metalized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provide optimal center-to-center spacing.
- Optional high lumen heads are 1.5 watts (12 LEDs x 0.125 watt per head) and provide increased center-to-center spacing.
- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.
- Available in both engineering grade, high-impact resistant polycarbonate or premium grade die-cast aluminum housing.
- Sealed and gasketed in standard gray or black finish.

FIXTURE COMPATIBILITY TABLE

Refer to individual specification sheets to confirm remote load capacity

EBU & EXIT MODELS			
CAD	CAL	CAR	CWL
DXR	RMR	CEM	IND
HLE	HLC		
CENTRAL BATTERY MODELS			
CBM	CBL	CBE	

CODES

- UL Listed for wet locations (-30°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

WARRANTY

- 5 year total customer satisfaction warranty.
For details see Signtex product catalog technical data section.

FIXTURE ORDERING INFORMATION EXAMPLE: *RHLOB2WPB-HL*

SERIES	OPERATION	LAMP HEADS	HOUSING	COLOR	OPTIONS
RHLO	RB Powered from EBU or EXIT Combo RE Powered from Central Battery System	1 Single Head 2 Double Head	WP Die-Cast PWP Thermoplastic	(Blank) Gray B Black	(Blank) 1W per head HL 1.5W per head


PROJECT:

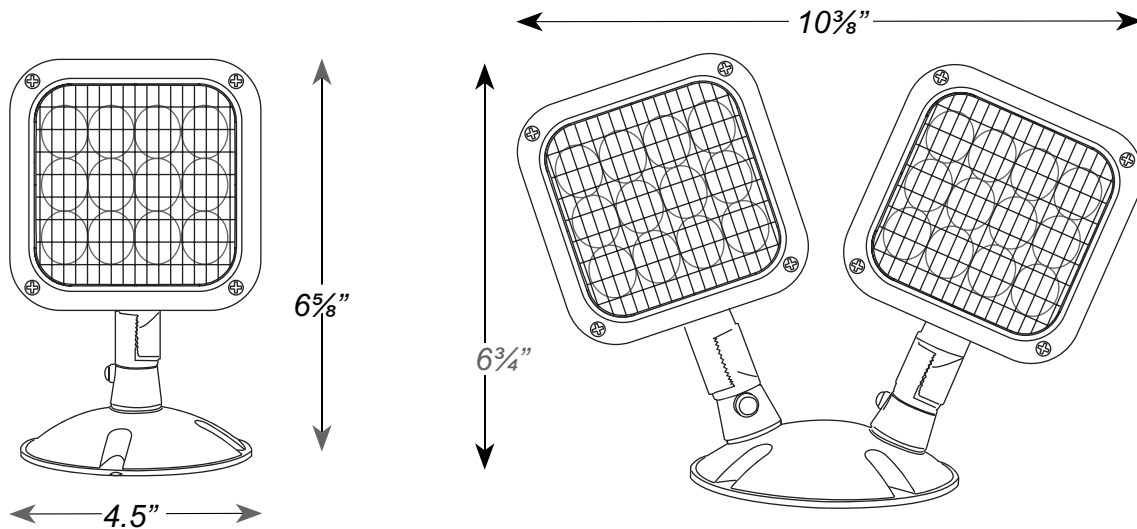
TYPE:

CATALOG #:

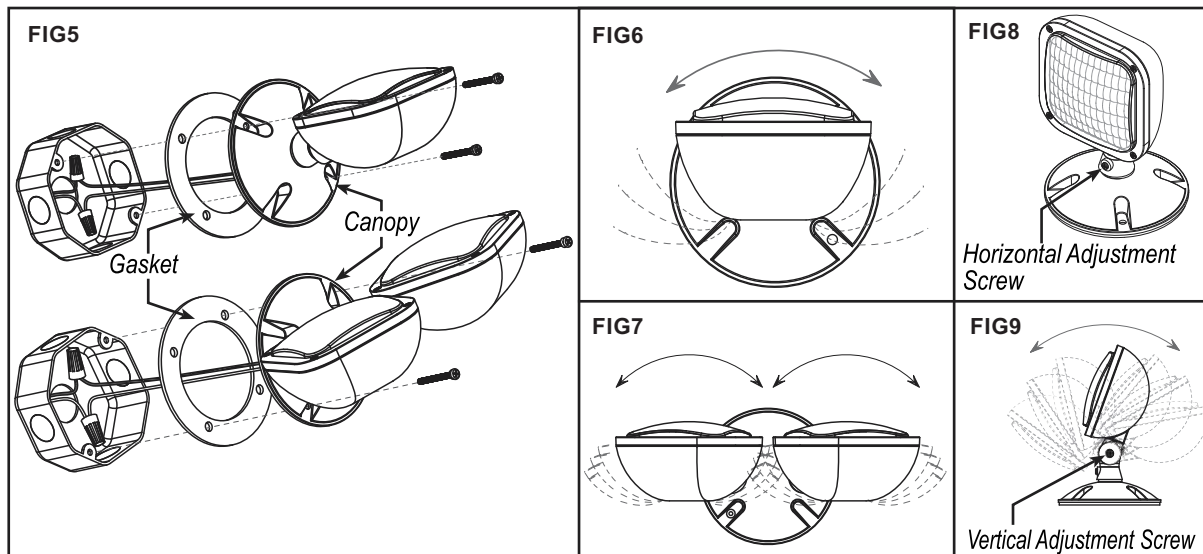
PATHLITE
Series RHLO

REV #: RHLO.11.25.04



DIMENSIONS

Heads can be rotated sideways (FIG. 6 & 7) by loosening the horizontal adjustment screw (FIG. 8) or tilted up/down by loosening the vertical adjustment screw (FIG. 9).

**DISTRIBUTOR**

Contact Sigtex for layout assistance.
Code compliant emergency lighting layouts provided!
Specifications and dimensions subject to change without notice.