

Compact Wet Location Polycarbonate Exit Sign

FEATURES

- Ultra bright, energy efficient, long life Red or Green LED.
- Polycarbonate mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.
- Injection-molded, engineering grade, 5VA flame retardant, thermoplastic in White, Black or Gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- EZ snap-out chevron directional indicators.
- Knockouts provided for conduit feed applications.

ELECTRICAL

- **AC Operation:** Dual 120/277 voltage.
- **DC Operation:**
Option **REC:** 24VDC for Central Battery systems.
Option **REP:** 48 & 60VDC for POE or DC power distribution systems.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only)
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C-120V/2C-277V: Voltage-specific Dual Circuit Option on the AC-Only unit enables it to be connected to two different power supplies at the same time.
- Custom: Signs available with requested 'special' wording.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (-20°C to 50°C).
- Certified to CEC under Title 20 Regulations.

ORDERING INFORMATION

EXAMPLE: BPW-REC-2RW-TP

BPW - REC - 2 R W - TP

MODEL SERIES	OPERATION	NO. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
BPW	BB Battery Backup NB No Battery(AC Only) REC Remote w/ Central Battery System REP Remote DC Power From Power Supply or POE system	1 Single Face 2 Double Face	R Red G Green	W White B Black G Gray	SDT Self-Diagnostics ¹ 2C-120 Dual Circuit with 120V input ² 2C-277 Dual Circuit with 277V input ² 48 48V DC input ³ 60 60V DC input ³ TP Tamper-Proof Custom Custom Wording

¹ Available only with BB Models

² Available only with NB units

³ Available only with REP units


PROJECT:
TYPE:
CATALOG #:

BUILDER Series BPW

REV #: BPW.06.26.03



DIMENSIONS

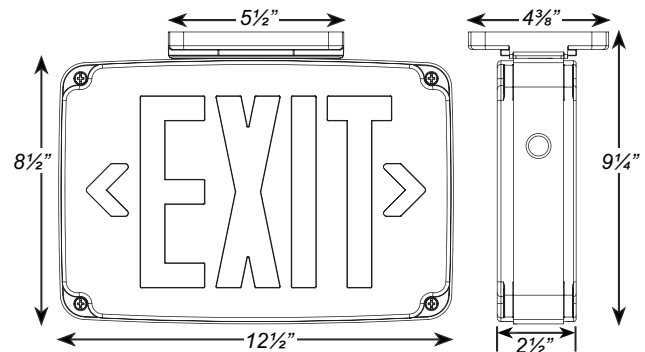

STANDARD



OPTIONAL

