

Low Profile LED Exit & Emergency Combo

FEATURES

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination
- EZ-snap thermoplastic mounting canopy included – provides top or end mount.
- Universal K/O pattern on back plate for wall mount.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

OPTIONS

- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.
- RC: Remote capacity of up to 1.0 watts

WARRANTY / LISTING

- 5 year total customer satisfaction warranty. For details see Signtex product catalog technical data section.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

FIXTURE ORDERING INFORMATION EXAMPLE: CEU-BB-3RW-HL

SERIES	OPERATION	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
CEU	BB Battery Unit RE Remote with Central Battery	3 Universal Single/Double	R Red G Green RG Red/Green	W White B Black	RC Remote Capacity ¹ HL High Lumen LED ¹ SDT Self-Diagnostics ² SPV 120/230 Volt 50/60Hz ²

NOTES:

¹ -HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option


² Not available with RG units.

PROJECT:
TYPE:
CATALOG #:

PATHLITE
Series CEU
 REV #: CEU.02.26.03



DIMENSIONS

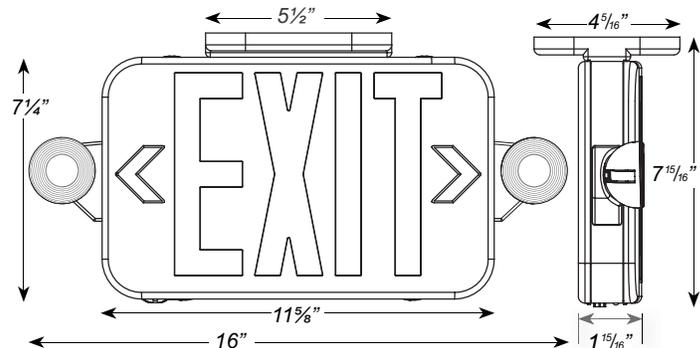

STANDARD



OPTIONAL



ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
CEU RG	1.2	N/A	1.2	0.12	N/A	0.12
CEU RG RC/HL	1.2	N/A	1.2	0.12	N/A	0.12
CEU RED/GREEN	1.2	1.2	1.2	0.12	0.12	0.12
CEU RED/GREEN RC/HL	1.2	1.2	1.2	0.12	0.12	0.12
CEU RED SDT	2.5	-	2.5	0.05	-	0.05
CEU RED SDT RC/HL	3.0	-	3.0	0.05	-	0.05
CEU GRN SDT RC/HL	2.7	-	2.7	0.05	-	0.05

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED	MRHLED	RH16LED	RH16		RH		RHR		SRH		SRHLED	
			MV			6V	12V	6V	12V	6V	12V	6V	12V		
CEU-RC	3.6V	1W	x	x											
CEU-HL	3.6V	0.5W		x											

Contact Signtex for layout assistance.
 Code compliant emergency lighting layouts provided!
 Specifications and dimensions subject to change without notice.