

Hazardous Location Polycarbonate Exit Sign

FEATURES

- Ultra bright, energy efficient, long life Red or Green LED.
- Die-cast mounting brackets provided for surface wall- mount installation.
- Pre-installed conduit hub for conduit and pendant-mount installations.
- Housing is fiberglass reinforced polycarbonate construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- EZ snap-out Chevron directional indicators.

ELECTRICAL

- **AC Operation:** Dual 120/277 voltage.
- **DC Operation:**
Option **REC:** 24VDC for Central Battery systems.
Option **REP:** 48 & 60VDC for POE or DC power distribution systems.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (BB models only)
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UI924, UI844, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (-20°C to 50°C).
- Certified to CEC under Title 20 Regulations.

STANDARD



OPTIONAL

PROJECT:

TYPE:


CATALOG #:

BUILDER
Series HZP

REV #: HZP.06.26.02



DIMENSIONS

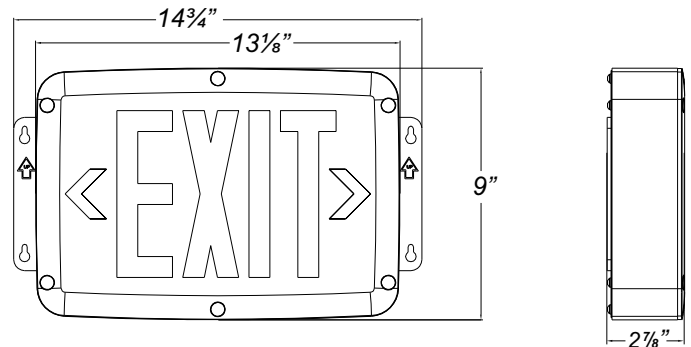

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120	277	120V	277V
HZP-RED/GREEN/BB/SDT	3.0	3.0	0.03	0.02

ORDERING INFORMATION

EXAMPLE: HZP-BB-2RG-SDT-TP

HZP - BB - 2 R G - SDT-TP

MODEL SERIES	OPERATION	NO. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
HZP	BB Battery Backup NB No Battery(AC Only) REC Remote w/ Central Battery System REP Remote DC Power From Power Supply or POE system	1 Single Face 2 Double Face	R Red G Green	G Gray	SDT Self-Diagnostics ¹ 48 48V DC input ² 60 60V DC input ² TP Tamper-Proof PENX Pendant Mount (X= Custom Length)

¹ Available only with BB Models

² Available only with REP Models