


Installation Instructions & Users Manual

SURFACE BRACKET TOP MOUNT RECESSED J-BOX

Fig. 1

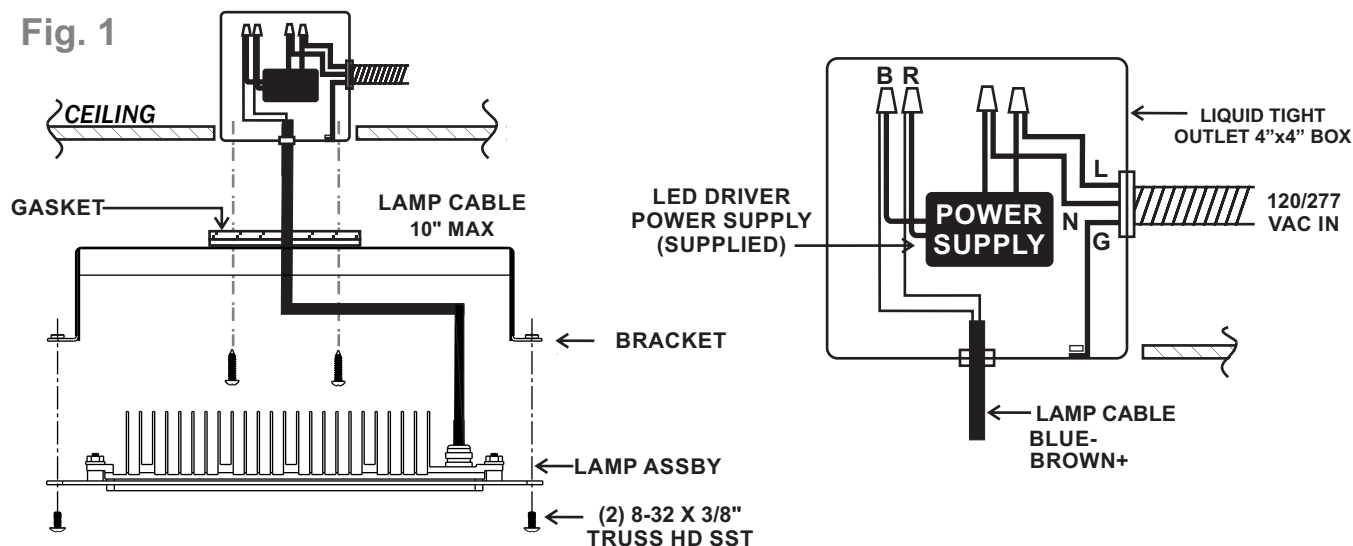

INPUT CONNECTIONS:

AC 120 / 277V INPUT
BLACK: LINE
WHITE: NEUTRAL
GREEN: GROUND

LAMP CONNECTIONS:

POWER SUPPLY	LAMP
BLACK: -	BLUE-
RED: +	BROWN+

1. See Fig 1, Identify mount position and install 4" x 4" LIQUID TIGHT J-Box near to fixture. Route AC 120 /277V wiring as shown and connect the power supply Black wire to the Line input power and white to Neutral input power circuit.
NOTE: Do not wire lamp without driver. This will damage the lamp.
2. Remove Lamp Assembly from mount bracket, Punch holes in correct location to match j-box. Secure bracket in position with (2) #8-32 screws and route lamp cable through gasket in top of bracket. insert lamp cable through liquid tight bushing into liquid tight j-box.
NOTE: If gaps appear around gasket, fill areas with silicone sealant.
3. Connect BROWN lamp wire to POSITIVE(RED) power supply output and BLUE lamp wire to COMMON NEGATIVE(BLACK) power supply output with standard wire nuts.

CHECK CONNECTIONS BEFORE SUPPLYING POWER, REVERSE POLARITY WILL PERMANENTLY DAMAGE THE FIXTURE

4. Supply AC power to check lamp operation.

IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- | | |
|---|---|
| 1. Disconnect AC power before servicing. | 7. Mount and secure the fixture at a location and height to avoid ready access and tampering by unauthorized persons. |
| 2. Refer to wiring diagram for proper connections. | 8. The use of accessory equipment is not recommended by the manufacturer and may cause an unsafe condition. |
| 3. All servicing should be performed by qualified personnel. | 9. Suitable for wet locations. See product label for temperature limitations. |
| 4. Consult your local building code for approved wiring and installation. | |
| 5. Do not use this equipment for other than intended use. | |
| 6. Do not let power cords touch hot surfaces. | |

SAVE THESE INSTRUCTIONS

SURFACE BRACKET TOP MOUNT WITH EXTERNAL J-BOX

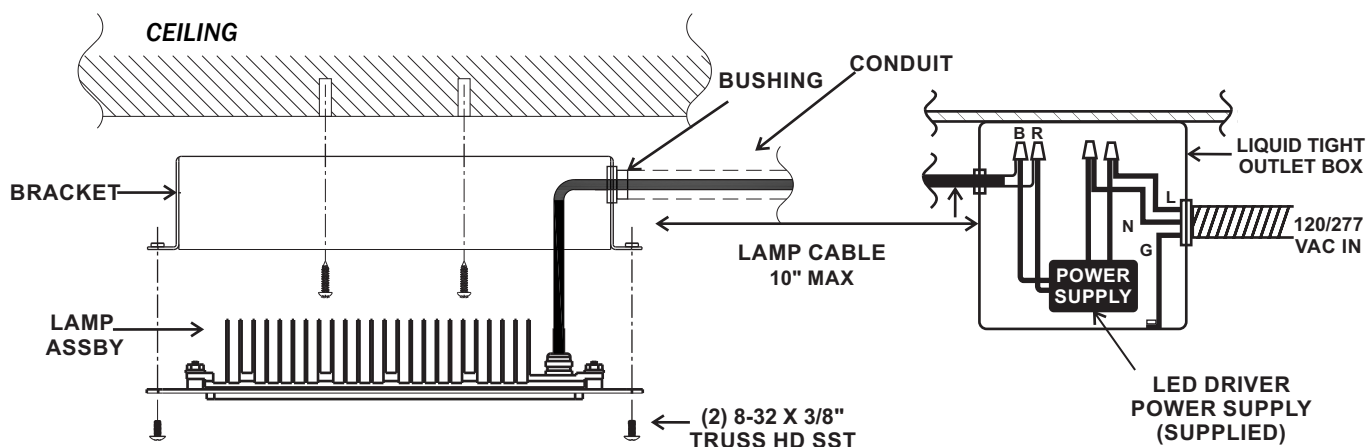


Fig. 2

INPUT CONNECTIONS:

AC 120 / 277V INPUT
BLACK: LINE
WHITE: NEUTRAL
GREEN: GROUND

LAMP CONNECTIONS:

POWER SUPPLY	LAMP
BLACK: -	BLUE-
RED: +	BROWN+

1. See Fig 2, Identify mount position and install 4" x 4" LIQUID TIGHT J-Box near to fixture. Route AC 120 / 277V wiring as shown and connect the power supply Black wire to the Line input power and white to Neutral input power circuit.
NOTE: Do not wire lamp without driver. This will damage the lamp.
2. Remove Lamp Assembly from mount bracket, Punch holes in correct location to match j-box. Secure bracket in position with (2) #8-32 screws and route lamp cable through gasket in top of bracket. insert lamp cable through liquid tight bushing into liquid tight j-box.
NOTE: If gaps appear around gasket, fill areas with silicone sealant.
3. Connect BROWN lamp wire to POSITIVE(RED) power supply output and BLUE lamp wire to COMMON NEGATIVE(BLACK) power supply output with standard wire nuts.

CHECK CONNECTIONS BEFORE SUPPLYING POWER, REVERSE POLARITY WILL PERMANENTLY DAMAGE FIXTURE

4. Supply AC power to check lamp operation.