

Thermoplastic Wet Location LED Emergency Unit

FEATURES

- Ultra-bright, energy efficient, long-life White LED lamps.
- Two fully adjustable semi-recessed, round lamp heads for optimal light distribution.
- Provides up to 20-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.
- 1.2 watt (12 LEDs x 0.10 watts) per head.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish.
- Universal knockout pattern on back plate for surface mount.
- Suitable for wall or ceiling mount.
- Spacing: 17-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.

ELECTRICAL

- Dual 120/277 voltage.
- Unique LED indicator light alerts occupant on battery condition (Red-normal, OFF-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V 700mAh long-life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MODEL	INPUT VOLTAGE (V)	INPUT CURRENT (A)	INPUT POWER (W)
OWLBBW	120/277	0.017	1.6

CODES

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 40°C).

WARRANTY

- 5 year total customer satisfaction warranty.
For details see Signtex product catalog technical data section.

FIXTURE ORDERING INFORMATION EXAMPLE: OWLBBW

OWL	BB	W
SERIES	OPERATION	HOUSING COLOR
OWL	BB Battery Unit	W White

PROJECT:



TYPE:

CATALOG #:

PATHLITE
Series OWL
REV #: OWL.08.26.01



DIMENSIONS

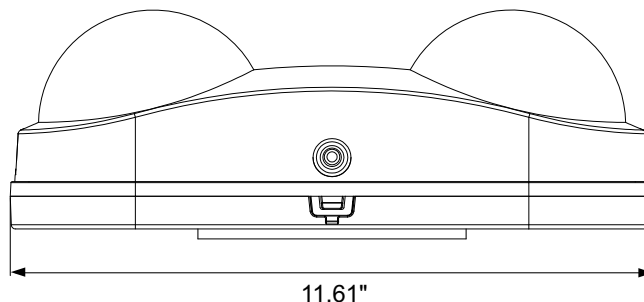

Contact Signtex for layout assistance.
Code compliant emergency lighting layouts provided!

STANDARD

