

Project:	
Type:	
Catalog #:	

STANDARD



ILLUMINATION

- Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 100-ft center-to-center spacing with a 6-ft path of egress at 15-ft mounting height.
- 6.0 watt (12 LEDs x 0.50 watt) per head.
- Adjustable glare-free PAR-Type lamp heads with all-inclusive lamp, reflector and lens assembly.

ELECTRICAL

- Powered from low voltage (5-15VDC) power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.


HOUSING

- Available in engineering grade, Impact-resistant polycarbonate housing.
- Sealed and gasketed in standard gray or black finish.

WARRANTY / LISTING

- Five year warranty.
- UL Listed for wet locations (-30°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

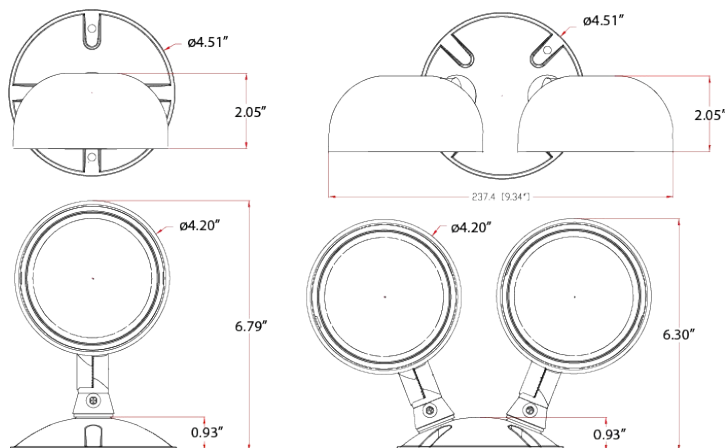

FIXTURE COMPATIBILITY LIST

Reference individual unit equipment specification sheets for remote load capacity availability.

BEST LIGHTING MODEL TYPE		
CALEDCXTE-RC	CWLEZXTE-RC	INDCWLEZ
HLCWLEZ	LEDSDXR627	HLEMR
INDEMR	NYDXR	RMR-16-65/125
LEDXR		

ORDERING INFORMATION

Sample Part Number: **HPRL1-WP**

MODEL	No. of HEADS	COLOR	HOUSING
HPRL	1 Single Head	(blank) Gray	WP Polycarbonate (Standard)
	2 Double Head	B Black	