

Compact Wet Location Exit & Emergency Combo

FEATURES

- Long lasting, efficient, ultra bright white LED lamp heads. 1.0W (1 LEDs x 1.0 watt) per head.
- Adjustable LED lamp heads provide up to 18-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.
- 5VA flame retardant, UV stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV stabilized polycarbonate clear lens.
- Corrosion resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators

ELECTRICAL

- Dual 120/277 voltage.
- Unique LED indicator light alerts occupant on battery condition (Red-normal, Off-check battery).
- 3.6V long life, maintenance free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lampheads for minimum 90-minute emergency illumination.
- Fully automatic solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

OPTIONS

- **CW:** Optional high capacity battery for extreme cold temperature applications (-20°C – 50°C).
- **RC:** Remote capacity of up to 2.0 watts with 3.6V battery.
- **TP:** Tamper-proof hardware helps prevent unauthorized access to the unit.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C to 50°C).
- Certified to CEC under Title 20 Regulations.

PROJECT:

TYPE:


CATALOG #:

PATHLITE
Series WLC

REV #: WLC.06.26.01



DIMENSIONS

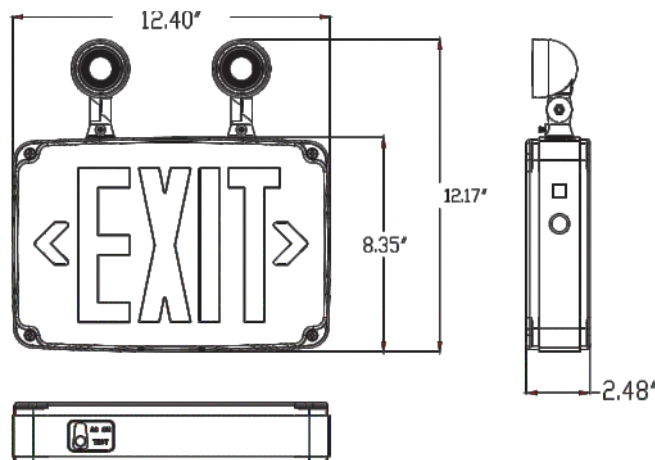

STANDARD



OPTIONAL



FIXTURE ORDERING INFORMATION EXAMPLE: WLC-BB-3RGW-RC

WLC	-	BB	-	3	RG	W	-	RC
SERIES		OPERATION		NO. OF FACES	LETTER COLOR	HOUSING COLOR		OPTIONS
WLC		BB Battery Unit RE Remote with Central Battery		1 Single Face 2 Double Face 3 Universal Single/Double	RG Red/Green (Field-selectable)	W White B Black G Gray (with white faceplate)		RC Remote Capacity ¹ CW Cold Weather ¹ TP Tamper Proof Screws

¹ Not available together.