Signtex Inc LIGHTING
INTELLIGENT EMERGENCY LIGHTING SYSTEMS

Wet Location Semi-Recessed LED MR-16 Emergency Unit

PROJECT:

TYPE:

CATALOG #:

FEATURES

- Two fully adjustable semi-recessed, round 7-watts LED MR16 lamp heads for optimal light distribution
- Ultra-bright, energy efficient, long-life White LED lamps provide up to 76-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations.
- Wall mount via knockouts on the back of the housing.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

PATHLITE
Series RMR
REV #: RMR.12.25.03

User's Manual

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
RMR	6.0	6.2	0.053	0.025
RMR-CW	5.3	6.0	0.050	0.025
RMR-SDT	5.5	6.7	0.050	0.030
RMR-CW-SDT	5.5	6.7	0.050	0.030

CODES

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (20°C – 40°C).

WARRANTY

- 5 year total customer satisfaction warranty. For details see Signtex product catalog technical data section.

DIMENSIONS

4¼"

5⅝"

14¹³⁄₁₆"

STANDARD

UL LISTED | WET | ALL LED

OPTIONAL

COLD | ASSEMBLED IN UNITED STATES | BC | SELF DIAGNOSTIC

FIXTURE ORDERING INFORMATION *EXAMPLE:* **RMRBBB-CW**

RMR   BB   B   CW

SERIES	OPERATION	HOUSING COLOR	OPTIONS
RMR	**BB** Battery Unit	(Blank) Gray **B** Black	**USA** Assembled in USA **SDT**[1] Self-diagnostics **CW** Internal heater with battery blanket **CEC** Certified to CEC under Title 20 Regulations

Contact Signtex for layout assistance.
Code compliant emergency lighting layouts provided!
Specifications and dimensions subject to change without notice.
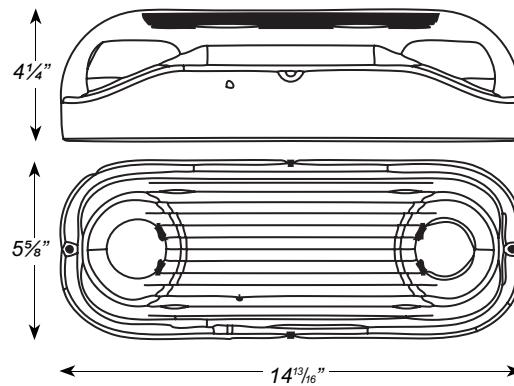
[1]Not available with CEC option